□□□□□□□□□□□□□□□□□SF-P111□□□□

ICT□□□□□□□□□□□

ICT□□□□□□□□□□□□□□□□□□□□□□□ □□ □□

ICT□□□□□□□□□□ PCB□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□

□□□□

□□ Shengyiifurui Electronic Technology Co.□Ltd□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□ □□□□□□30□□□□□□□□□□□□□□□15□□□□□□□□□□□□□□□□□□□□□□□I S O 9 0 0 0 1□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□ 2010□□□ □□PCB□ICT□SMT□IC□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□ □□□□□□□

ICT□□□□□□ SF-P111 □□□□

SF-P111

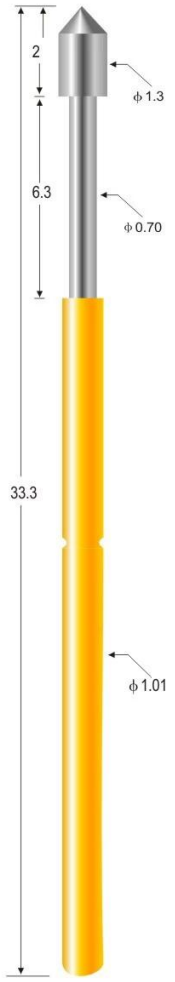

SF-P111-E

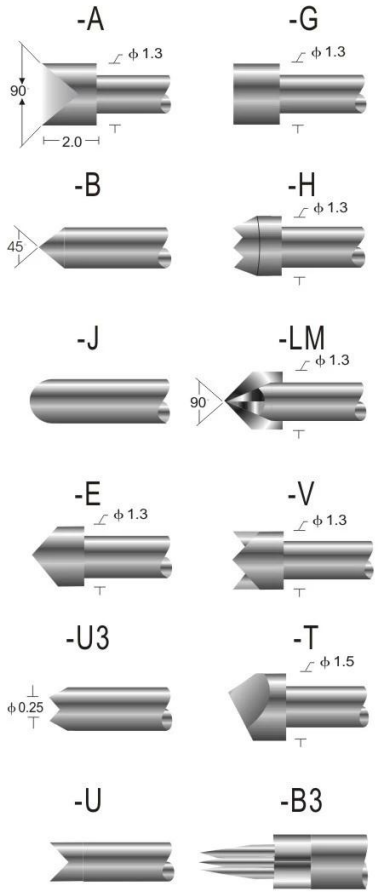

Probe specifications SF-P111(技术规格)

- Recommended minimum center(最小间距):
  1.90mm(.0748 ")
- Mounting hole size(钻孔尺寸):
  压克力：1.35mm(.0532 ")
  电木板、玻璃纤维板：1.40mm(.0551 ")
- Full travel(行程)：6.3(.2481 ")
- Spring force(弹簧压力)：120g
- Materials and finishes(材料及涂饰):
  Plunger:Be Cu,Rh plated
  Barrel:Brass,Gold plated
  Spring:Stainless steel
- Current ration(额定电流)：3A(安培)
- Contact resistance(接触电阻)：50mΩ(毫欧姆)

Noted：Specifications subject to change without notice(注：规格变动不另行通知)

□□□□

1. PCB□ICT□FCT□□□□□

2. pogo□□□□□□

3.□□□□□□□□□□

4.□□□□□□□□□□□