

0000	SFENG
000	DDDDDDDD SF-KP1.65*44.6-A1.5
	000000
	00
	000000000
000	300g[]10.8[][][][][]200g[]7.2[][][][][]100g[]3.6[]
	5.0mm
00000	1.5±0.2mm
	10mΩ
	00000000000000000
	000
MOQ	100
00	15 00 00000 00



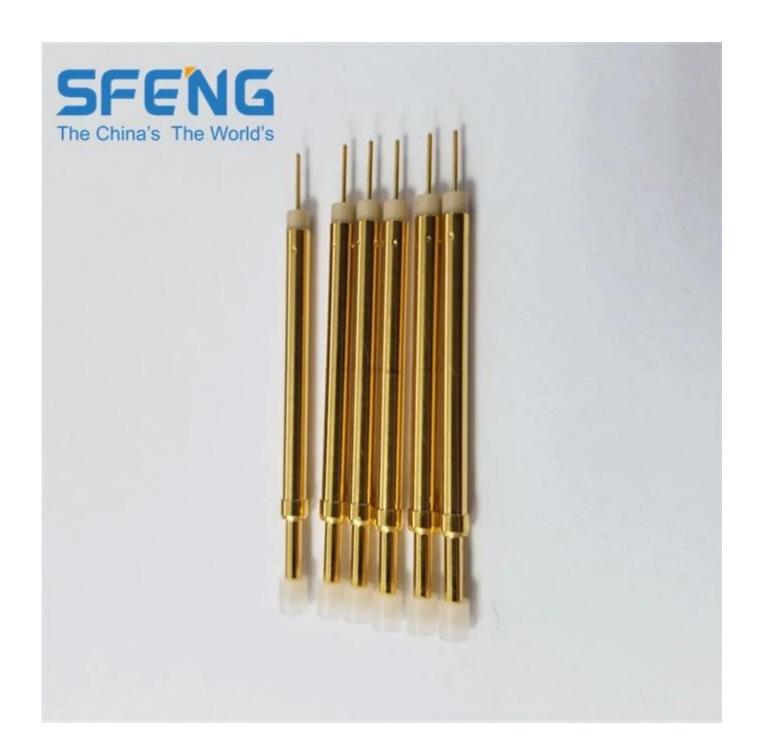

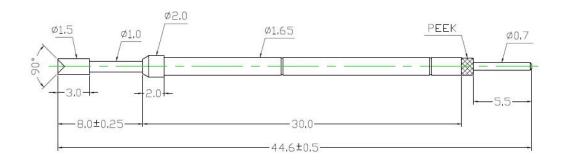

Specifications (技術要求):
Full Stroke (蔣沖程) : 5.0mm
Rated Stroke (額定沖程) : 4.0mm
Spring Force (額定彈力) : 300±20%gf@ load 4.0mm
Swithching Path (开失距离): 1.5±0.2mm

Materials (plated) (材質與鍍層):
Barrel (針套) : Ph (磷銅)
Plunger (針軸) : BeCu (铍铜)
Tail pin(尾针) : BeCu (铍铜) , Au on Ni Plated , Au on Ni Plated , Au on Ni Plated : Ph (磷銅) : BeCu (铍铜) : BeCu (铍铜)

Spring (彈弓) : SWP(琴线) , Au on Ni Plated

						名 称: SF-开关针1.65X44.6-A1.5(开)							(开)	胜峰科技	
标记处数 更改													说明: 1. 所有尺寸单位为=== 2. 未注图示尺寸公差: 按CB1804-79 11級精度执行		
设	it	标		准化		8	样标	记	视	图	质	量	比例	2. 本往闽小八寸公左: 按GB1804-79 11級精度执行	
校	对	市	ī	定		0	Α.		\Box	0			1	图纸编号:	
审	核	制	ij	图	HJQ	2	A		D	Ψ			/		
I	艺	B	1	期	2020-11-7	共	1		页	第		1	页		





PCB_ICT_FCT _______ (_____)_

BGADODDDDDDDDDDDDDD

00000;0000/0000;

____30#OK_____POM____







1. Raw material warehouse 2. Lathe workshop

3. Assemble workshop








4. Quality inspection

5. Finished products


6. Packing



1. Agilent current testing



2. Quadratic element



3.Load Curve Meter



4.Bond Test



5.Life Fatigue Test



6.Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.













