


□□□□

□□□□	SFENG
□□□□	SF-P156
□□□□□□	□□
□□□	□□
□	SUS□□□□□□□□
□□□□□□	250□□□
□□□□	6.30□0.2480 "□
□□□□	□5□a□
□□□□	50□□□□W
□□□	4.75□0.1870 "□
□□□□□□	2.75□0.1083 "□/ 2.80□0.1102 "□
MOQ	100 □
□□□□□□	□□□□□□□□□7□□□

□□□□□

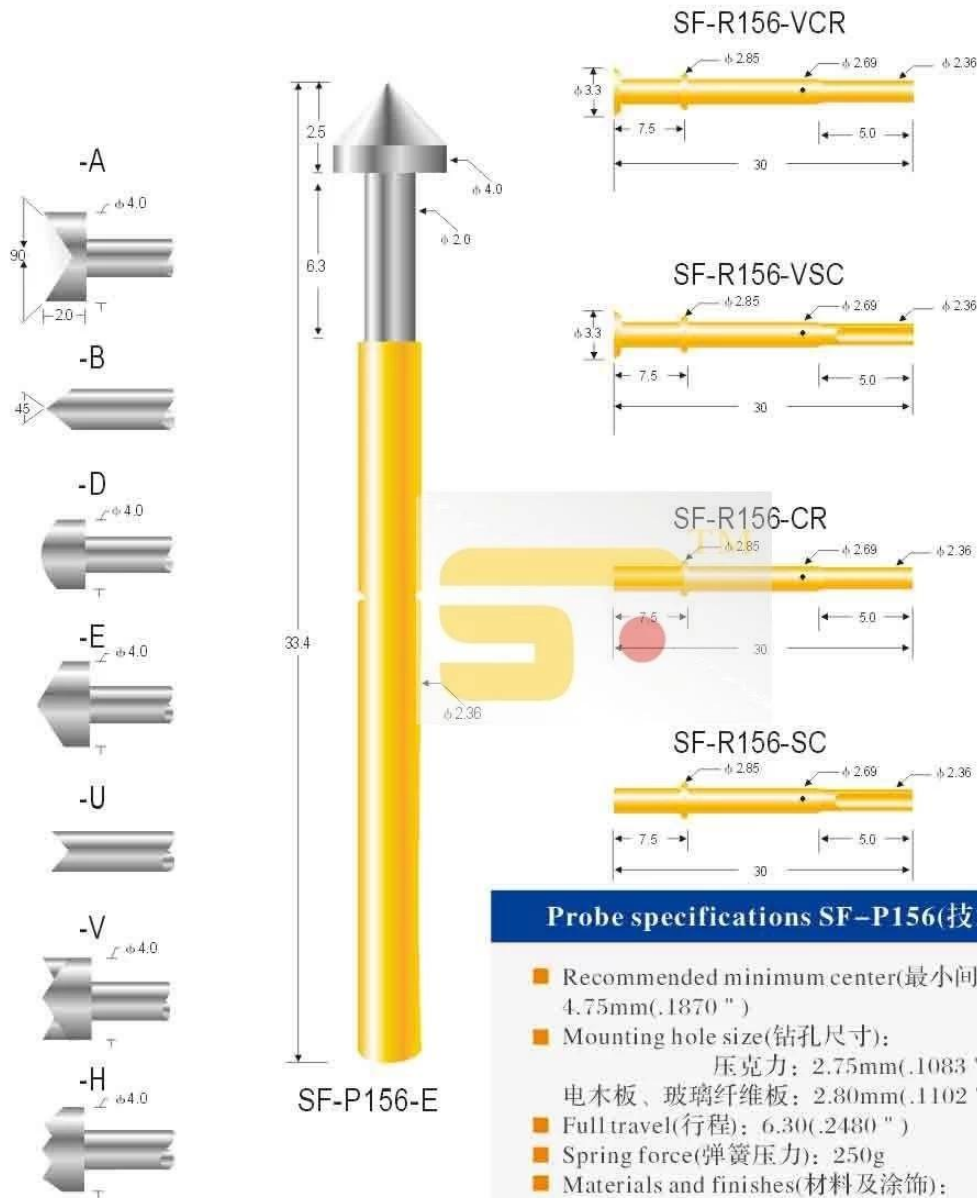

## Probe specifications SF-P156(技术规格)

- Recommended minimum center(最小间距): 4.75mm(.1870")
- Mounting hole size(钻孔尺寸):  
压克力: 2.75mm(.1083")  
电木板、玻璃纤维板: 2.80mm(.1102")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 250g
- Materials and finishes(材料及涂饰):  
Plunger: Be Cu, Rh plated;  
Barrel: Brass, Gold plated  
Spring: Stainless steel
- Current rating(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式):  
Crimp: R156-VCR, R156-CR  
Solder cup: R156-VSC, R156-SC



chinapogopinsupplier.com

### 公司简介

1. 专业生产各种规格探针 24 小时服务热线
2. 提供 OEM 定制服务
3. 产品广泛应用于 PCB、ICT、FCT 测试
4. 拥有完善的质量管理体系

### 产品

PCB、ICT、FCT 测试探针

提供 24 小时服务热线 & 技术支持

BGA 测试探针



