


□□□□


□□□□	SFENG
□□□□	SF-P080
□□□□□□	□□□
□□□	□□□
□	□
□□□□□□	15□□□
□□□□	1.5□0.0590 "□
□□□□□	0.3A
□□□□□	260□□□□W
□□□	0.45□0.0177 "□
□□□□□□	0.35□0.0138 "□
MOQ	100 □
□□□□□□	7 □□□□□□□□□□□□

□□□□□


# SF-P080




-J

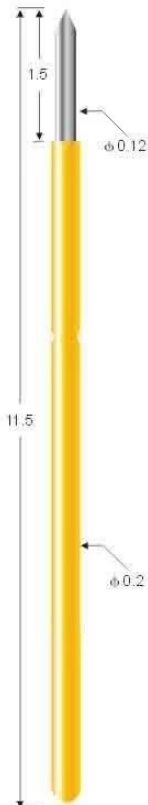

SF-P080-B



SF-R080-VR

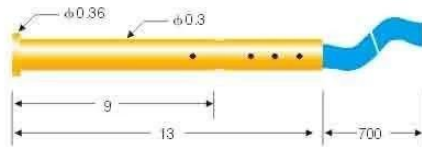

SF-R080-VRW

## Probe specifications SF-P080 (技术规格)

- Recommended minimum center (最小间距): 0.45mm (.0177")
- Mounting hole size (钻孔尺寸): 0.35mm (.0138")
- Full travel (行程): 1.5 (.0590")
- Spring force (弹簧压力): 15g (克)
- Materials and finishes (材料及涂饰):  
Plunger: SK4, Rh plated  
Barrel: Phosphor bronze, Gold plated  
Spring: Music wire, Gold plated
- Current rating (额定电流): 0.3A (安培)
- Contact resistance (接触电阻): 260mΩ (毫欧姆)

### Receptacle specifications

Materials and finishes: Phosphor bronze, Gold plated



chinapogopinsupplier.com

### 服务宗旨

1. 24小时服务
2. OEM
- 3.
- 4.

### 产品

PCB ICT FCT

2 &

BGA



