


□□□□□□

SFENG 1984 探针系列 ( **PCB** ) 探针系列


□□□□□

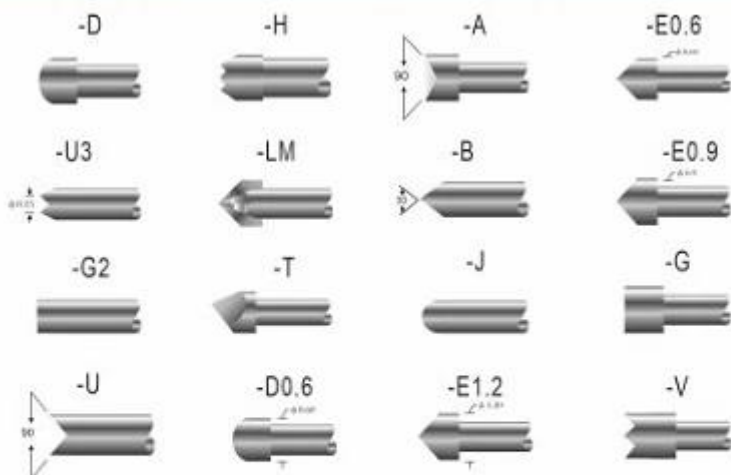





技术规格  
PROBE SPECIFICATIONS

Recommended minimum center 最小间距	1.27mm(.0500 ")
Mounting hole size 钻孔尺寸	V: 0.90mm(.0354 ") W: 0.95mm(.0374 ")
Full travel 行程	2.5(.0984 ")
Spring force 弹簧压力	100g(克)
Materials and finishes 材料及涂饰	Plunger:SK4, Ni or Au plated BeCu, Ni or Au plated Barrel:Phosphor bronze, Au plated Spring:Stainless steel
Current ration 额定电流	1.5A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)

Receptacle specifications  
Materials and finishes: Phosphor bronze,Gold plated

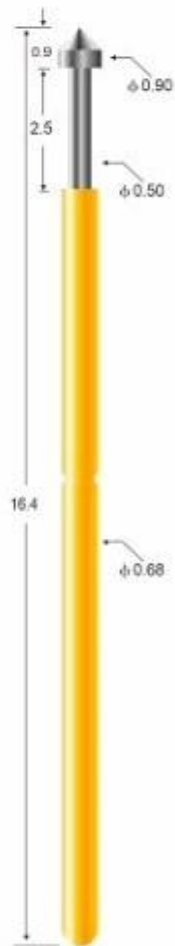

SF-P50-E

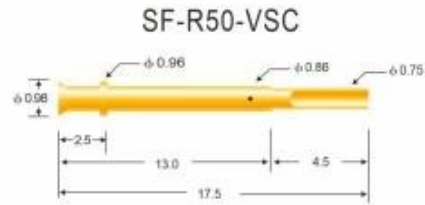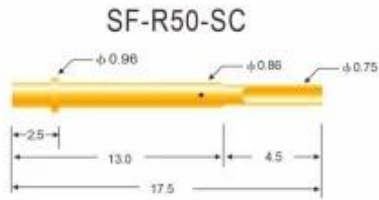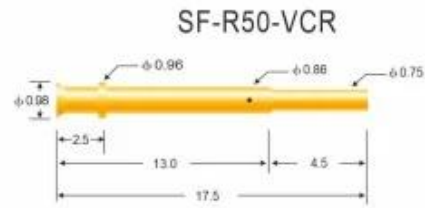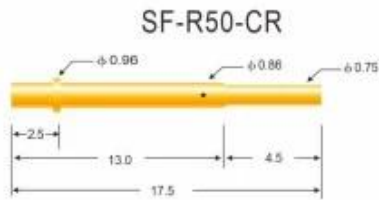

### 技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	1.27mm(.050 ")
Mounting hole size 钻孔尺寸	V: 0.90mm(.0354 ") W: 0.95mm(.0374 ")
Full travel 行程	2.0(.0787 ")
Materials and finishes 材料及涂饰	Barrel: Phosphor bronze, Au plated
Connections 接线形式	Crimp: R50-CR, R50-VCR Solder cup: R50-SC, R50-VSC Wire wrap: R50-CRW, R50-VRW

Receptacle specifications  
Materials and finishes: Phosphor bronze, Gold plated

□□□□□□□□:

□□□□	SF-P50
□□□□□□	1□27mm□.0500"□
□□□□□□	V:0.90mm□.0354"□ □:0.95mm□.0374"□
□□□□□□	2.5□.0787"□
□□□	100□□□
□□□□□□	□□□□□□SK4□Rh□□□□ □□□□□□□□□□□□□□ □□□□□□□□□□□□□□
□□□□□□	1.5A





□□□□



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop




4. Quality inspection




5. Finished products



6. Packing



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Q1. 請說明...

A1: 請說明...

Q2. 請說明...

A2: 請說明 QC 請說明... 1 請說明...

Q3. 請說明...

A3: 請說明...

Q4. 請說明...

A4: 請說明...

Q5. 請說明...

A5: 請說明...

Q6. 請說明...

A6: 請說明...

Q7. OEM 與 ODM 的區別?

A7: 請說明 OEM / ODM 的區別 . P 請說明...

Q8. 請說明...

A8: T/T 請說明 L/C 請說明 MOQ 請說明

請說明...

請說明 DHL UPS FedEx TNT EMS 請說明

請說明 Exwork FOB CNF CIF 請說明



2023 ISO Certificate



Patent for Coaxial Structure



Patent for Honeycomb current probe











□□□□□□



CIBF2021

苏州胜亿福睿电子科技有限公司  
Suzhou Shengyifurui Electronic Technology Co., Ltd

No.3B013

