□□□□□

□□□□	SFENG
□□□□	SF-P020-B
□□□	Ni□□□□□□□□□□□
□□□□□□	□□□□□□□□□□7□□□

□□□□□

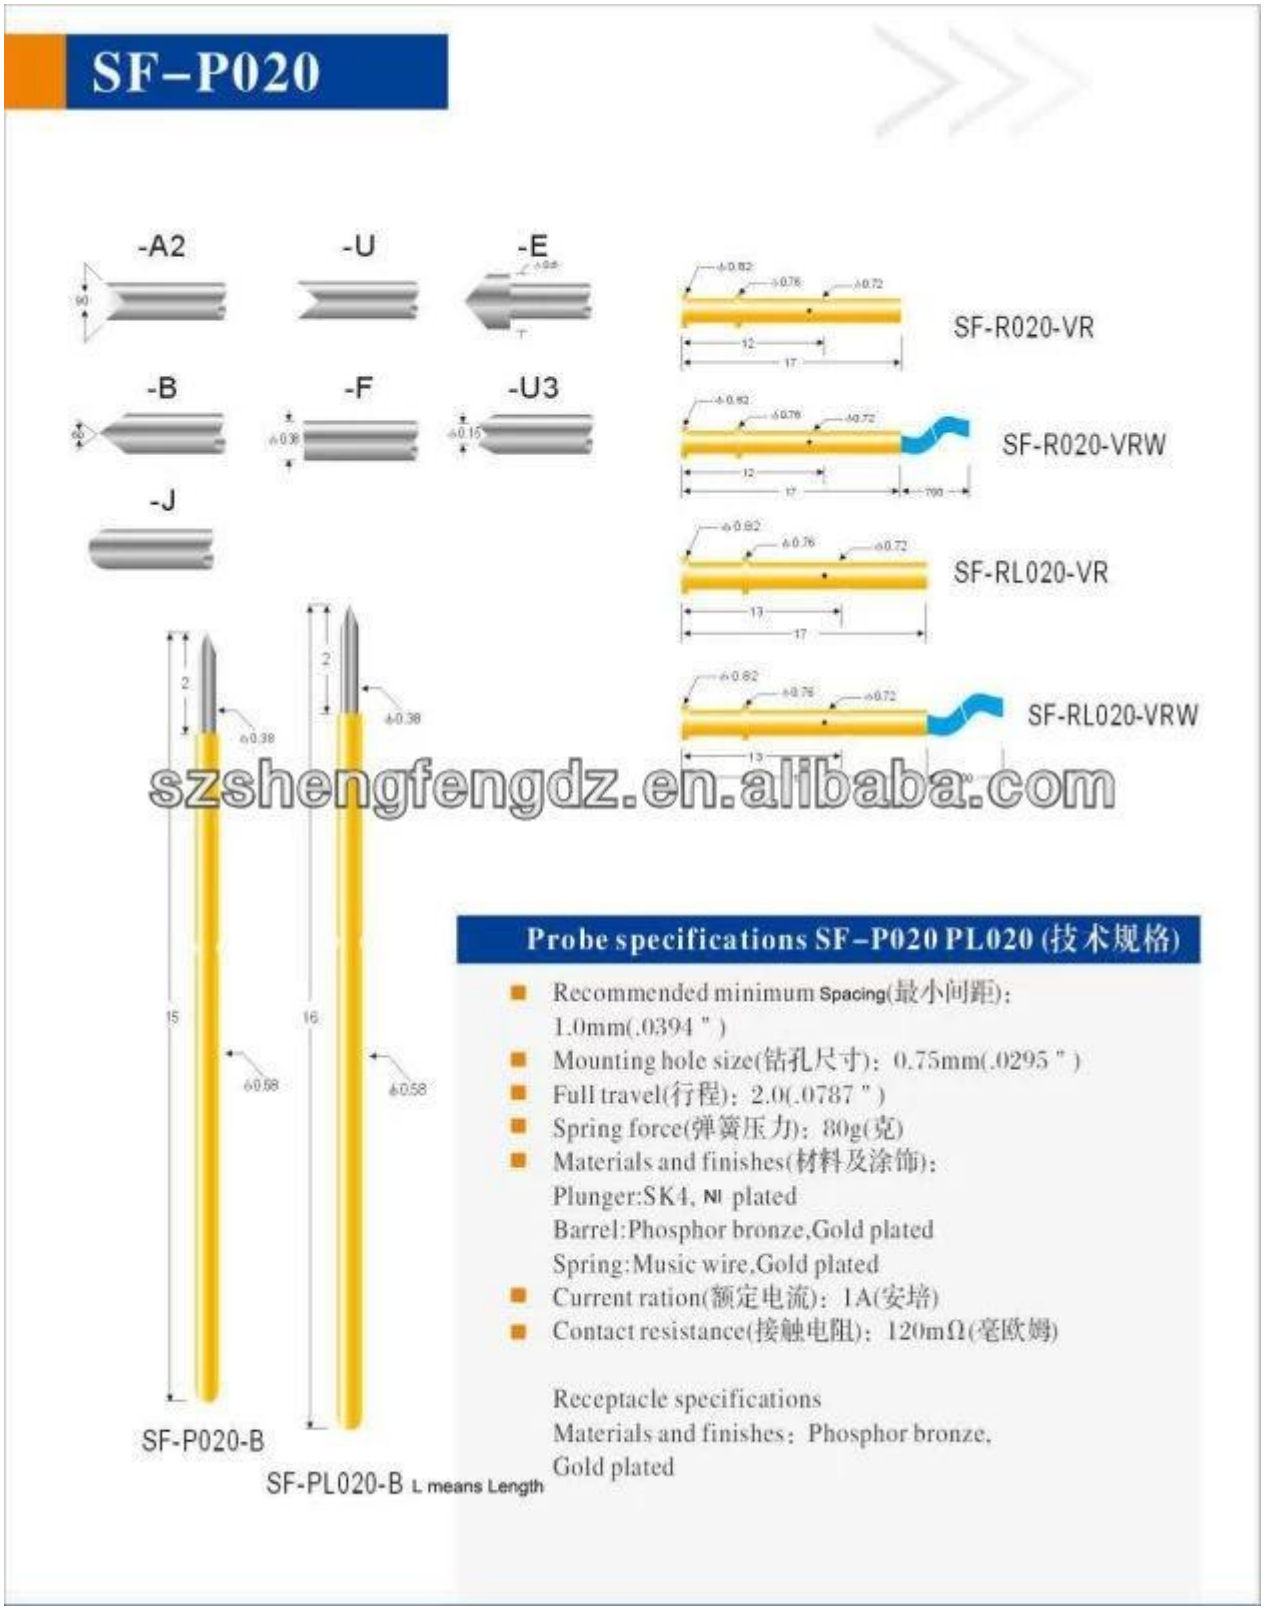
SF-P020
-A2
-U
-E
-B
-F
-U3
-J
SF-R020-VR
SF-R020-VRW
SF-RL020-VR
SF-RL020-VRW
szshengfengdz.en.alibaba.com
Probe specifications SF-P020 PL020 (技术规格)
Recommended minimum Spacing(最小间距):
1.0mm(.0394 ")
Mounting hole size(钻孔尺寸): 0.75mm(.0295 ")
Full travel(行程): 2.0(.0787 ")
Spring force(弹簧压力): 80g(克)
Materials and finishes(材料及涂饰):
Plunger:SK4, Ni plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
Current ration(额定电流): 1A(安培)
Contact resistance(接触电阻): 120mΩ(毫欧姆)
Receptacle specifications
Materials and finishes: Phosphor bronze,
Gold plated
SF-P020-B
SF-PL020-B L means Length

□□□□□□□□

1.□□□□□□□□□□□□□□□□□□□□□□ 24□□□□□□□□□□□□□□□□

2.□□□□□□□ □□□□□□□□□□□□□OEM□□□□□□□□□□□□

3.□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□

4.□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□

PCB□ICT□FCT□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□2□□□□□□□□□□□□□□□□□□□