
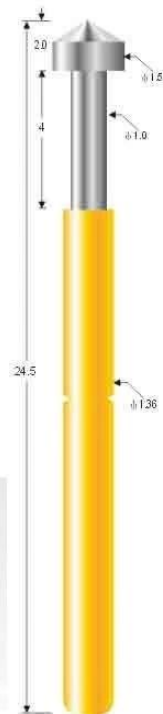
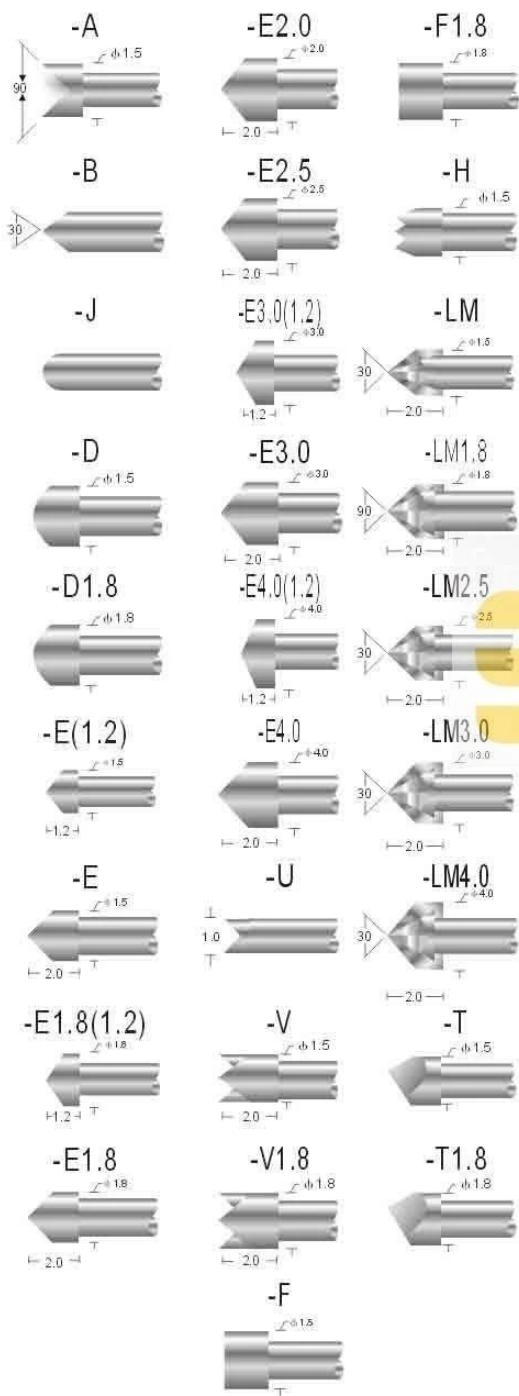


□□□□

□□□□	SFENG
□□□□	SF-P160
□□□□□□	□□
□□□	□□□
□	SUS□□□□□□□□
□□□□□□	200□□□
□□□□	4.0□0.1575 "□
□□□□□	□3□a□
□□□□□	50□□□□W
□□□	2.54□0.1000 "□
□□□□□□	1.70□0.0670 "□/ 1.75□0.0689 "□
MOQ	100 □
□□□□□□	7 □□□□□□□□□□□□

□□□□□

SF-P160



SF-P160-E

Probe specifications SF-P160(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000 ")
- Mounting hole size(钻孔尺寸):
压克力: 1.70mm(.0670 ")
电木板、玻璃纤维板: 1.75mm(.0689 ")
- Full travel(行程): 4.0(.1575 ")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated; SK4, Rh plated
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ (毫欧姆)

胜峰探针
SFENG
The China's The World's



chinapogopinsupplier.com



chinapogopinsupplier.com

服务宗旨

1. 提供24小时售后服务
2. 提供OEM定制服务
3. 提供技术支持
4. 提供样品

产品

PCB ICT FCT

24小时

BGA

