


□□□□

□□□□	SFENG
□□□□	SF-P50
□□□□□□	□□
□□□	□□
□	SUS□□□□□□□□
□□□□□□	100□□□
□□□□	2.5□0.0984 "□
□□□□□	1.5A
□□□□□	50□□□□W
□□□	1.27□0.0500"0
□□□□□□	0.90□0.0354 "□/ 0.95□0.0374 "□
MOQ	100 □
□□□□□□	7 □□□□□□□□□□□□


□□□□□

SF-P50

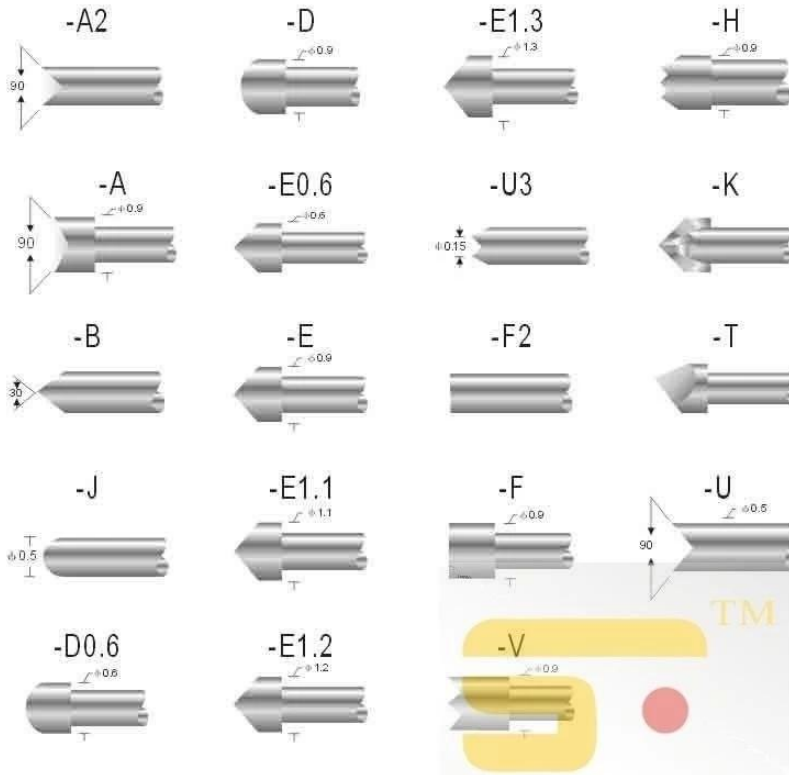

Probe specifications SF-P50(技术规格)

- Recommended minimum center(最小间距):
1.27mm(.0500 ")
- Mounting hole size(钻孔尺寸):
V: 0.90mm(.0354 ")
W: 0.95mm(.0374 ")
- Full travel(行程): 2.5(.0984 ")
- Spring force(弹簧压力): 100g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated; SK4, Rh plated
Barrel: Phosphor bronze, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 1.5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

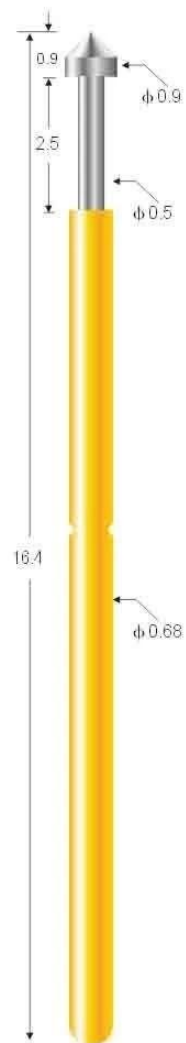

SF-P50-E



chinapogopinsupplier.com

服务宗旨

1. 提供24小时售后服务
2. 提供OEM定制服务
3. 提供技术支持
4. 提供物流配送

产品

PCB ICT FCT 测试探针

提供24小时技术支持 & 物流配送

BGA 测试探针

