




SFENG 1984 胜峰科技 (SFENG 1984) 胜峰科技



品名	SF-开关针1.65*46.6-J1.0
规格	针套: BeCu/Au/Ni 针轴: Ph/Au/Ni 琴线: SWP/Au on Ni 尾针: BeCu/Au on Ni
全长	5.0mm
行程	4.0mm
弹力	300±20%gf@4.0mm
开关距离	1.5±0.2mm
MOQ	100
备注	7000

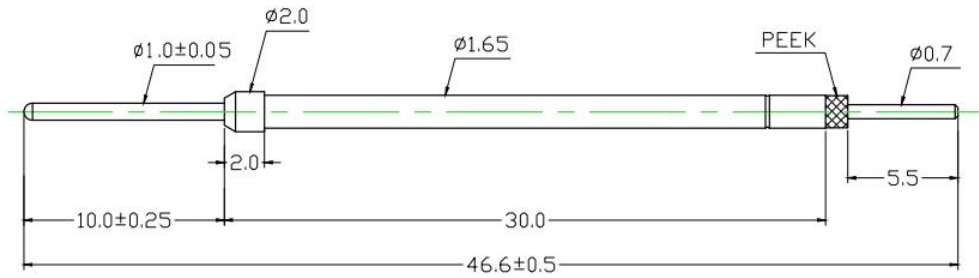

Specifications (技术要求):
 Full Stroke (满冲程): 5.0mm
 Rated Stroke (额定冲程): 4.0mm
 Spring Force (额定弹力): 300±20%gf@ load 4.0mm
 Switching Path (开关距离): 1.5±0.2mm

Materials (plated) (材質與鍍層):
 Barrel (針套): Ph (磷銅), Au on Ni Plated
 Plunger (針軸): BeCu (铍銅), Au on Ni Plated
 Tail pin (尾针): BeCu (铍铜), Au on Ni Plated
 Spring (彈弓): SWP (琴线), Au on Ni Plated

名称:				胜峰科技	
SF-开关针1.65X46.6-J1.0				说明: 1. 所有尺寸单位为mm 2. 未注图示尺寸公差: 按GB1804-79 11级精度执行	
标记	处数	更改文件号	签字	日期	图样标记
设计			标准化		视图
校对			审定		质量
审核			制图	HJQ	比例
工艺			日期	2022-9-21	/
			共	1	页
			第	1	页
图纸编号:					



1. 24
2. OEM
- 3.
- 4.



1. PCB ICT FCT
2. 2
3. BGA
4. QZ VZ LM
- 5.
- 6.
7. 30# OK POM





1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope





2023 ISO Certificate



Patent for Coaxial Structure



Patent for Honeycomb current probe



□□□□□□□□ DHL □ UPS □ FedEx □ TNT □ EMS □□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□ Exwork □ FOB □ CNF □ CIF □□□□□□□□□□□□□□□□□□

