




SFENG
The China's The World's



chinapogopinsupplier.com

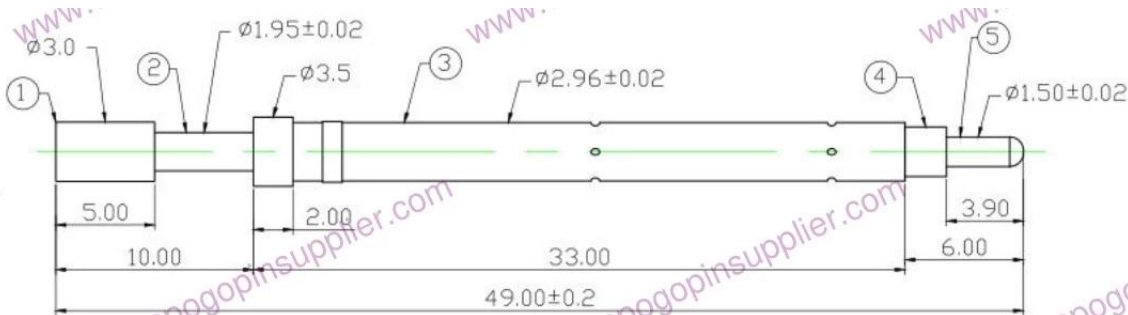

Material and Plating:(材质与电镀):

- ① Plastic tip(塑料头): White POM (白色POM);
- ② Plunger(针杆): Brass, Au plating (黄铜镀金);
- ③ Barrel(针套): Brass, Au plating (黄铜镀金);
- ④ Insulation sleeve(绝缘套): PEEK;
- ⑤ Tail pin(尾针): Phosphor bronze, Au plating (磷铜镀金);

Technical parameters: (技术要求):

- ① Working stroke: 1.5mm;
- ② Spring force: 100g±20g@1.5mm;

优势

1. 自主研发设计，24小时快速响应
2. 品质保证，OEM 服务
3. 价格公道，交货及时
4. 售后服务完善，客户至上

应用

适用于 PCB、ICT、FCT 测试 (SMT) 等场合;

适用于 (SMT) 测试站、测试平台 & 测试工装等 2 种场合;

BGA 测试等场合;

适用于 QZ、VZ 等 LM 测试;

适用于 测试;

适用于 & socket;

适用于 30 # OK 测试、POM 测试

规格

