





SFENG 1984 零件清單 (零件名稱、規格、單位、數量、備註) 零件名稱: PCB 零件規格: 零件單位: 零件數量: 零件備註:



零件名稱	SF-P160
零件規格	2.54mm \times 1.000"
零件單位	零件規格: 1.70mm \times .0670" 零件規格: 1.75mm \times .0689"
零件數量	4.0 \times .1575
零件重量	200g
零件材料	零件材料: Cu \times Rh \times SK4 \times Rh 零件材料: 零件材料:
零件電流	3A
零件電阻	50m Ω
MOQ	100
零件備註	零件備註: 7



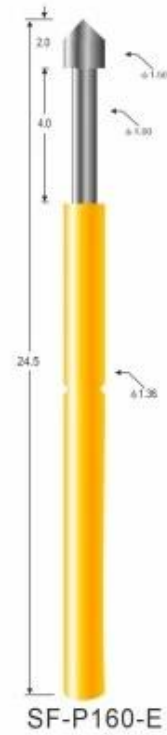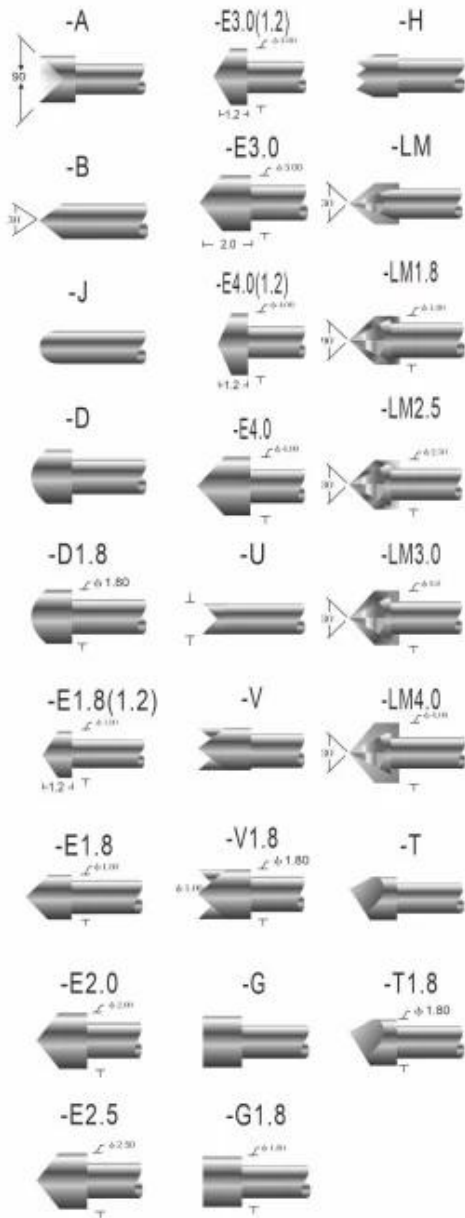










SF-P160-E

技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	2.54mm(.1000 ")
Mounting hole size 钻孔尺寸	冲击力: 1.70mm(.0670 ") 电木板、玻璃纤维板: 1.75mm(.0689 ")
Full travel 行程	4.0(.1575 ")
Spring force 弹簧压力	200g(克)
Materials and finishes 材料及涂饰	Plunger:BeCu, Ni or Au plated Phosphor bronze, Ni or Au plated Barrel:Phosphor bronze, Au plated Spring:Stainless steel
Current ration 额定电流	3A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze,Gold plated

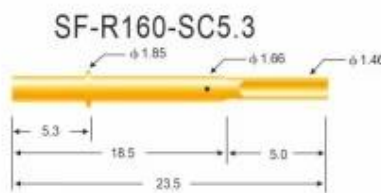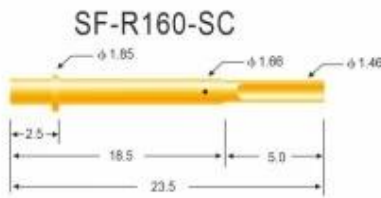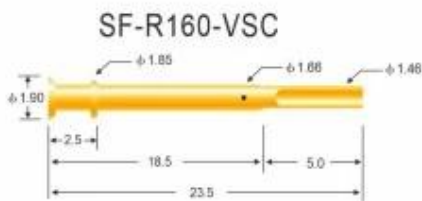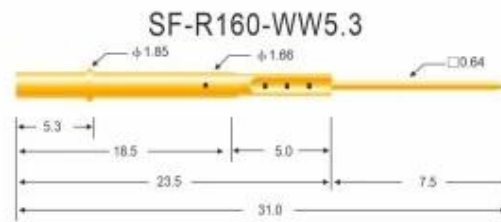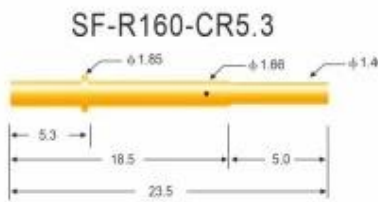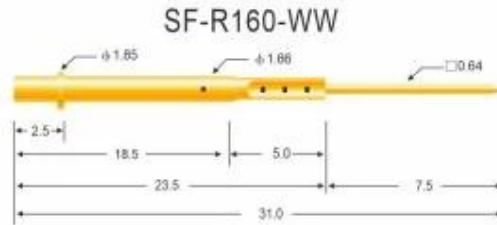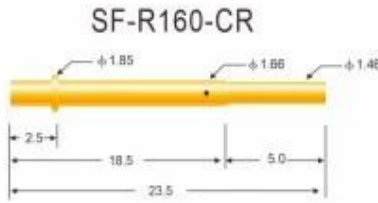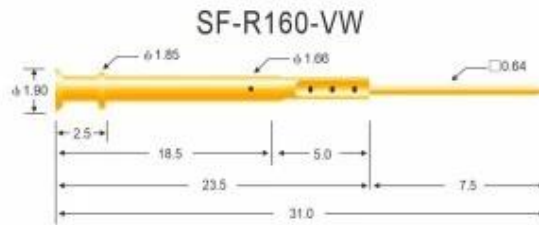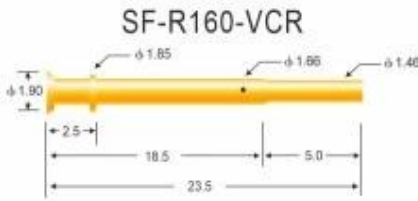

技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	2.54mm(.1000 ")
Mounting hole size 钻孔尺寸	压克力: 1.70mm(.0670 ") 电木板、玻璃纤维板: 1.75mm(.0689 ")
Materials and finishes 材料及涂饰	Barrel: Brass, Au plated
Connections 接线形式	Crimp: R160-VCR, R160-CR, R160-CR5.3 Solder cup: R160-VSC, R160-SC, R160-SC5.3 Wire wrap: R160-VW, R160-WW, R160-WW5.3

Receptacle specifications
Materials and finishes: Phosphor bronze, Gold plated



1. 24-pin probe
2. OEM probe
3. Probe
4. Probe



1. PCB ICT FCT
2. 2
3. BGA
4. QZ VZ LM
- 5.
- 6.
7. 30# OK POM



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing



