




**SFENG 1984** ( )



Part Number	SF-PL50
Thickness	1.27mm±.0500"
Dimensions	V:0.90mm±.0354" W:0.95mm±.0374"
Weight	4.20±.1654g
Material	120g Cu/Rh SK4/Rh
Current	3A
Resistance	50mΩ
MOQ	100
Lead Time	7 weeks




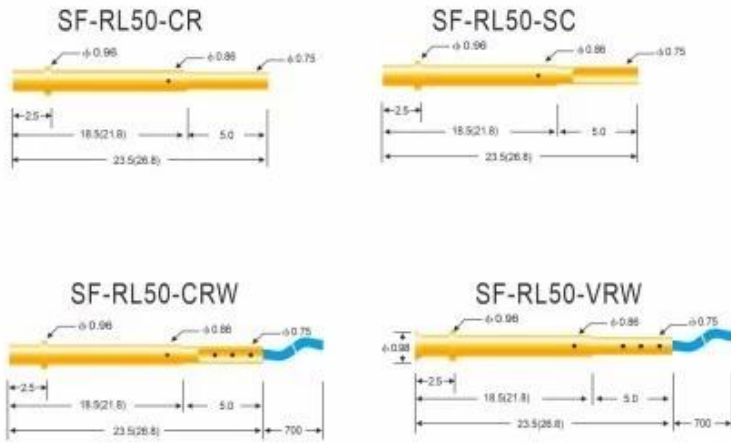

### 技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	1.27mm(.0500 ")
Mounting hole size 钻孔尺寸	V: 0.90mm(.0354 ") W: 0.95mm(.0374 ")
Full travel 行程	4.20(.1654 ")
Spring force 弹簧压力	120g(克)
Materials and finishes 材料及涂饰	Plunger:SK4, Ni or Au plated BeCu, Ni or Au plated Barrel:Phosphor bronze, Au plated Spring:Stainless steel
Current ration 额定电流	3A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)

Receptacle specifications  
Materials and finishes: Phosphor bronze,Gold plated

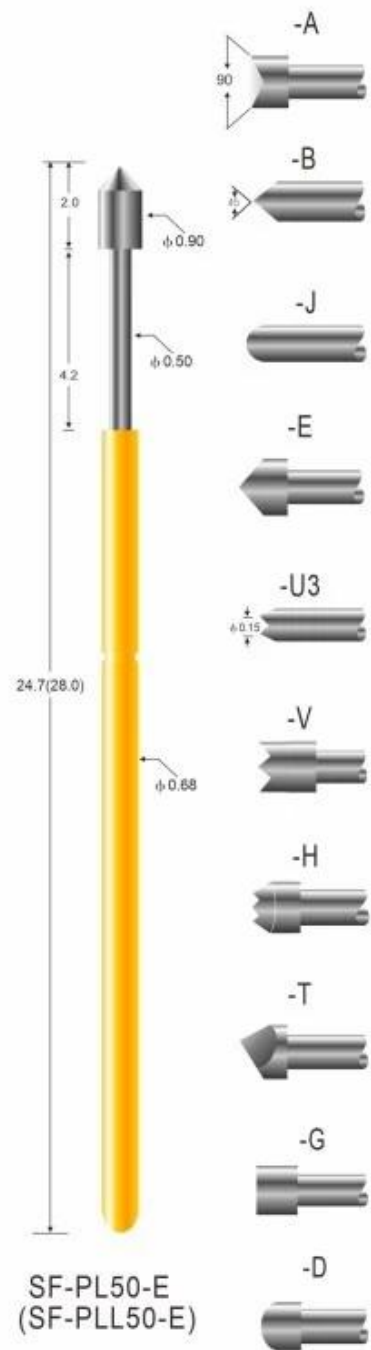


1. 24
2. OEM
- 3.
- 4.



- 1.PCB ICT FCT
2. 2
3. BGA
- 4.QZ VZ LM
- 5.
- 6.
- 7.30# OK POM



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope







