


□□□□


□□□□	SFENG
□□□□	SF-P080
□□□□□□	□□
□□	□□
□	□
□□□	15g
□□□□□□	1□5(0.0590□□□)
□□□□□□	0.3A
□□□□	50mW
□□□	0.45□0.0177□□□□
□□□□□□	0.35(0.0138"")
MOQ	100□
□□□□□□	□□□□□□□□□□7□□□

□□□□


SF-P080




-J

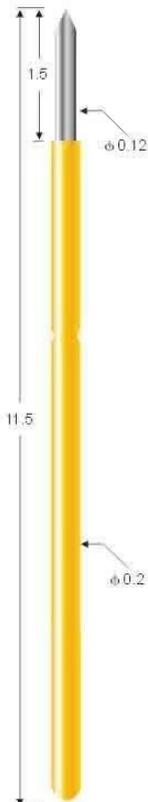

SF-P080-B



SF-R080-VR

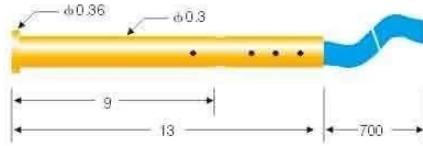

SF-R080-VRW

Probe specifications SF-P080 (技术规格)

- Recommended minimum center (最小间距): 0.45mm (.0177 ")
- Mounting hole size (钻孔尺寸): 0.35mm (.0138 ")
- Full travel (行程): 1.5 (.0590 ")
- Spring force (弹簧压力): 15g (克)
- Materials and finishes (材料及涂饰):
Plunger: SK4, Rh plated
Barrel: Phosphor bronze, Gold plated
Spring: Music wire, Gold plated
- Current rating (额定电流): 0.3A (安培)
- Contact resistance (接触电阻): 260mΩ (毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze, Gold plated



chinapogopinsupplier.com

公司简介

1. 专业生产24针探针
2. 专业生产各种规格探针OEM 服务
3. 专业生产各种规格探针
4. 专业生产各种规格探针 .


产品

PCB ICT FCT 探针 (各种)

专业生产各种规格探针 2 针探针

BGA 探针

专业生产各种规格探针 QZ VZ LM

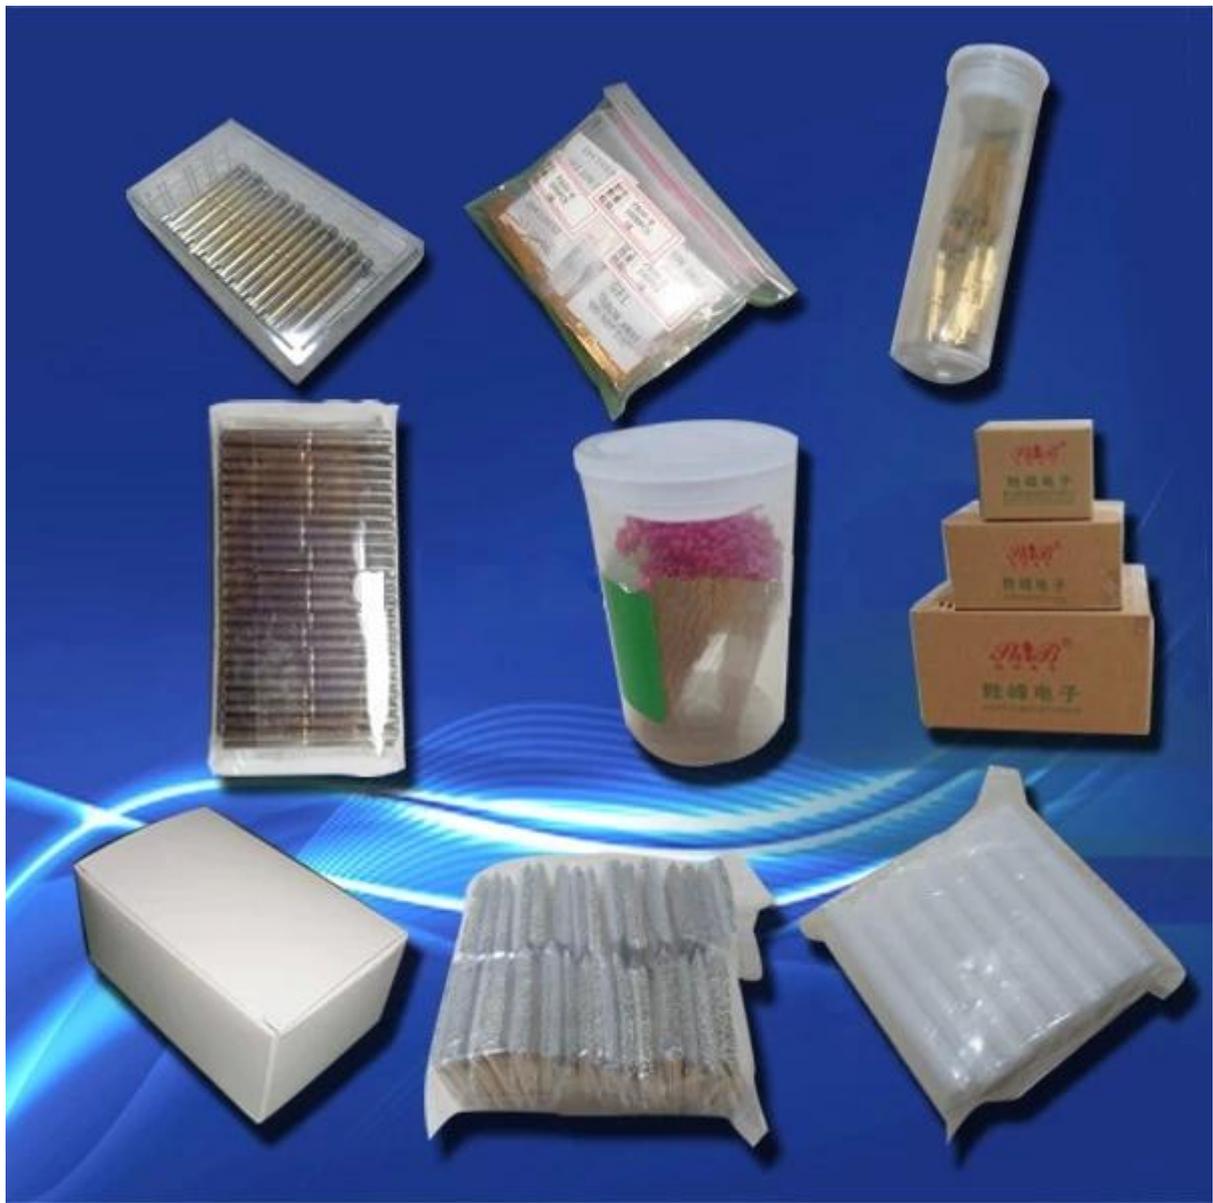

□□□□□□

