


□□□□

□□□□	SF7145
□□□□□□□□	3.5mm
□□□□□□□□	2.0mm
□□□□	2000±20%
□□□□□□□□	0.5±0.2mm
□□□□□□□□	□□□□□□□□□□
□□	□□□□□□□□□□
□□□□□□	□□□□□□□□
□□□□□□□□□□□□	OEM □ ODM
MOQ	100□
□□□□□□	□□□□□□□□□□□□
□□□□	100% T/T□□□□
□□	□□□□□□□□□□□□ 5 □ 10 □

□□ □□□□□□

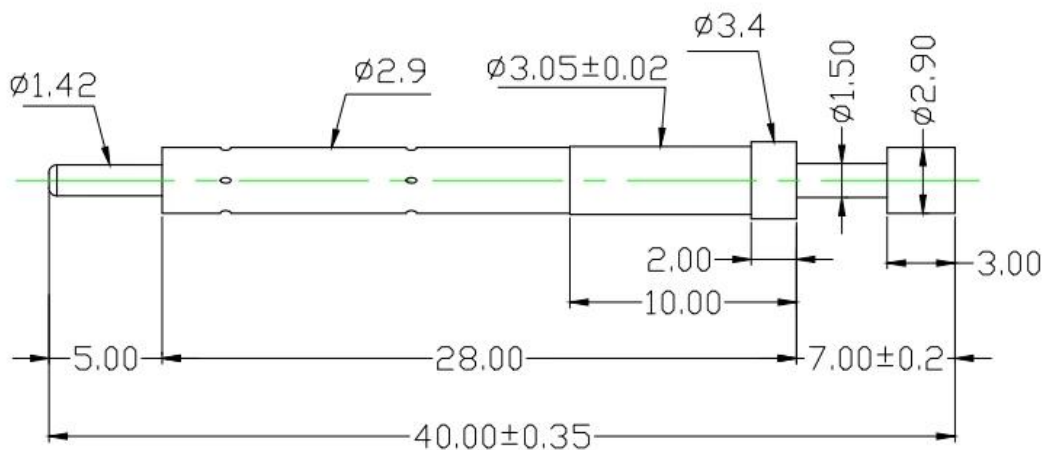

材质与电镀:

1. 针头: 易车铁镀镍
2. 针套: 黄铜镀镍
3. 尾针: 黄铜镀金

技术要求:

- 满行程: 3.5mm
- 额定行程: 2.0mm
- 额定弹力: 2000±20%g
- 开关距离: 0.5±0.2mm

□□ □□



1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing



## Measuring Equipment >



### Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test



