




SFENG 1984 公司 (PCB 製造商) 提供各種 PCB 產品，包括：  
 1. 各種規格之 PCB 板  
 2. 各種規格之 PCB 板  
 3. 各種規格之 PCB 板



產品名稱	SF-P100
厚度	1.90mm±.0748"
公差	±.135mm±.0532" ±.140mm±.0551"
重量	6.3±.2481g
材料	120g
表面處理	鍍銅Cu/Rh 鍍金Au 鍍銀Ag
電阻	3A
電容	50mΩ
MOQ	100片
備註	請洽業務部7000



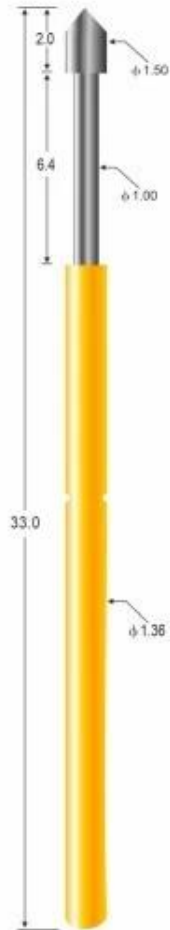



SF-P100-E

## 技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	1.90mm(.0748 ")
Mounting hole size 钻孔尺寸	压克力: 1.35mm(.0532 ") 电木板、玻璃纤维板: 1.40mm(.0551 ")
Full travel 行程	6.3(.2481 ")
Spring force 弹簧压力	120g(克)
Materials and finishes 材料及涂饰	Plunger:SK4, Ni or Au plated BeCu, Ni or Au plated Phosphor bronze, Ni or Au plated Barrel:Phosphor bronze, Au plated Spring:Stainless steel
Current ration 额定电流	3A(安培)
Contact resistance 接触电阻	50mΩ(毫欧姆)

Receptacle specifications  
Materials and finishes: Phosphor bronze,Gold plated

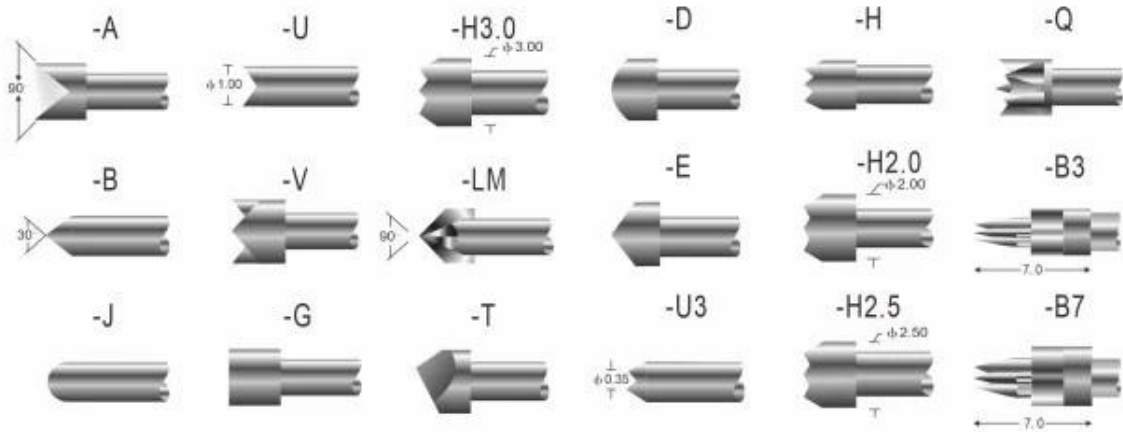

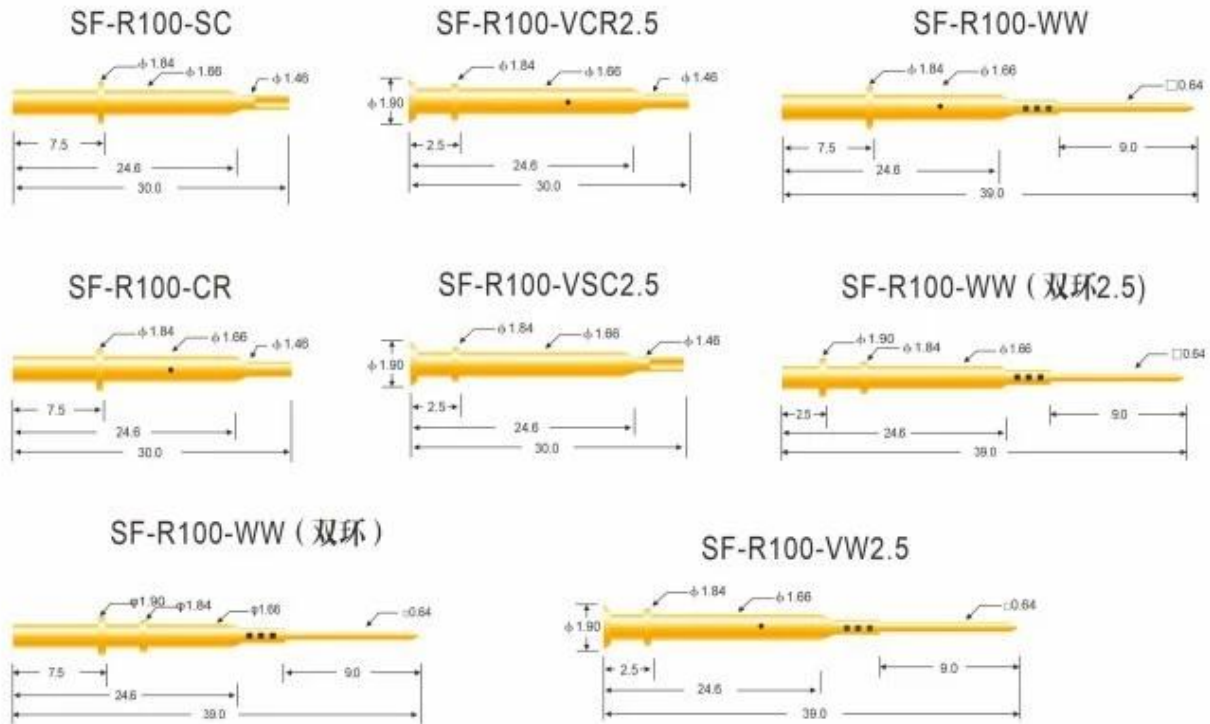

## 技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	2.54mm(.1000 ")
Mounting hole size 钻孔尺寸	压克力: 1.70mm(.0670 ") 电木板、玻璃纤维板: 1.75mm(.0689 ")
Materials and finishes 材料及涂饰	Barrel: Brass, Gold plated
Connections 接线形式	Crimp: R100-VCR2.5, R100-CR Solder cup: R100-VSC2.5, R100-SC Wire wrap: R100-VW2.5, R100-WW, R100-WW(双环2.5), R100-WW(双环)

Receptacle specifications  
Materials and finishes: Phosphor bronze, Gold plated



1. 24-pin receptacle
2. OEM receptacle
3. Receptacle
4. Receptacle



1. PCB ICT FCT
2. 2
3. BGA
4. QZ VZ LM
- 5.
- 6.
7. 30# OK POM



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing









