
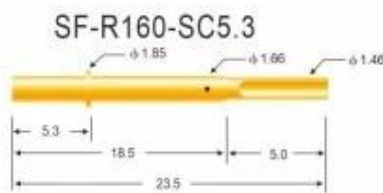
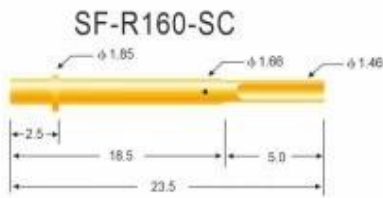
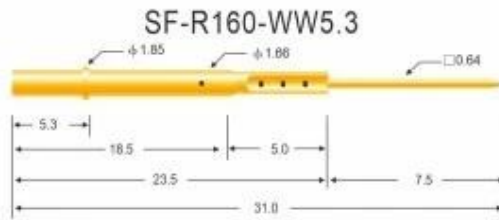
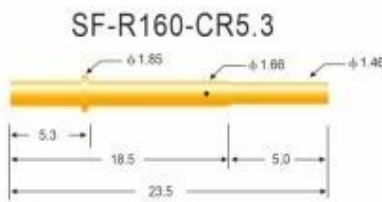
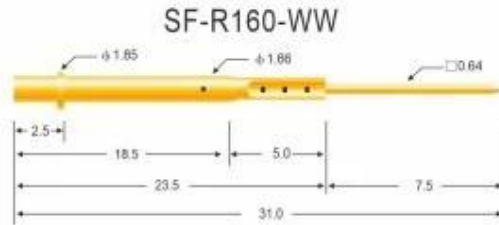
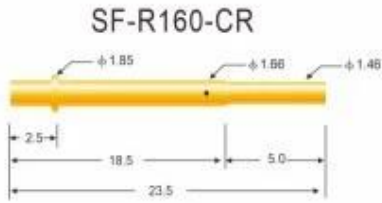
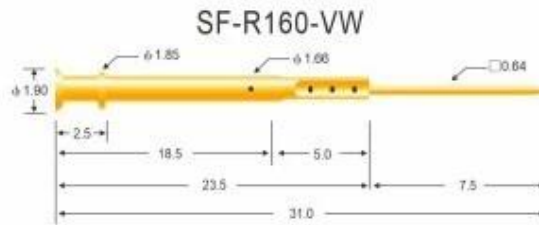


SF-P160-E

技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	2.54mm(.1000 ")
Mounting hole size 钻孔尺寸	冲击力: 1.70mm(.0670 ") 电木板、玻璃纤维板: 1.75mm(.0689 ")
Full travel 行程	4.0(.1575 ")
Spring force 弹簧压力	200g(克)
Materials and finishes 材料及涂饰	Plunger:BeCu, Ni or Au plated Phosphor bronze, Ni or Au plated Barrel:Phosphor bronze, Au plated Spring:Stainless steel
Current ration 额定电流	3A(安培)
Contact resistance 接触电阻	50m Ω (毫欧姆)

Receptacle specifications
Materials and finishes: Phosphor bronze,Gold plated

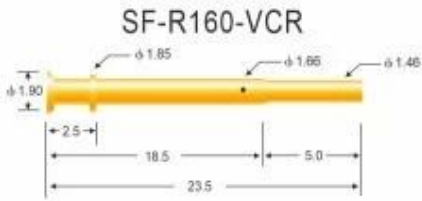

技术规格 PROBE SPECIFICATIONS

Recommended minimum center 最小间距	2.54mm(.1000 ")
Mounting hole size 钻孔尺寸	压克力: 1.70mm(.0670 ") 电木板、玻璃纤维板: 1.75mm(.0689 ")
Materials and finishes 材料及涂饰	Barrel: Brass, Au plated
Connections 接线形式	Crimp: R160-VCR, R160-CR, R160-CR5.3 Solder cup: R160-VSC, R160-SC, R160-SC5.3 Wire wrap: R160-VW, R160-WW, R160-WW5.3

Receptacle specifications
Materials and finishes: Phosphor bronze, Gold plated



- 1 24
- 2 OEM
- 3
- 4



1. PCB, ICT, FCT

2. 2

3. BGA

4. QZ, VZ, LM

5.

6.

7. 30# OK, POM



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing



