

0000

0000	SFENG
0000	SF-P030-A
000000	00000000000000Ni000
00	0000000Ni000
0	SK400000
000000	60000
000	2.0000000
00000	1A
000000	150mΩ
000	0.9000000
000000	0.65000000
MOQ	100
000000	00000000007000

00000

胜峰探针
SFENG
The China's The World's

RoHS

QUALITY ASSURED FIRM
ISO 9001
SGS

CE


chinapogopinsupplier.com

Probe specifications SF-P030 PL030(技术规格)

- Recommended minimum center(最小间距): 0.90mm(.0354 ")
- Mounting hole size(钻孔尺寸): 0.65mm(.0256 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 60g(克)
- Materials and finishes(材料及涂饰):
 Plunger:SK4,Rh plated
 Barrel:Phosphor bronze,Gold plated
 Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 150mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze,
Gold plated

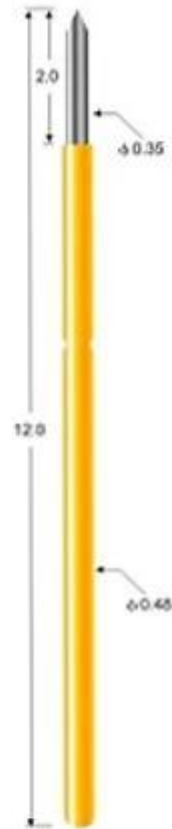

SF-P030-B

□□□□□□

24□□□□withn□□□□□□1.Reply

2.Customized□□□□□□OEM□□□□□□□□

□□□□□□□□□□□□□□□□□□3.Delivery

□□□□□□□□□□□□□□□□□□4.provide

□□□□

PCB□ICT□FCT□□□□□□□□□□---□□□□□□□□□□□□

□□usuallytemporary□□□□□□□□---□□□□□□□□□□

□□□□□□□□2□□□□□□□□□□□□□□□□□&□038;

