
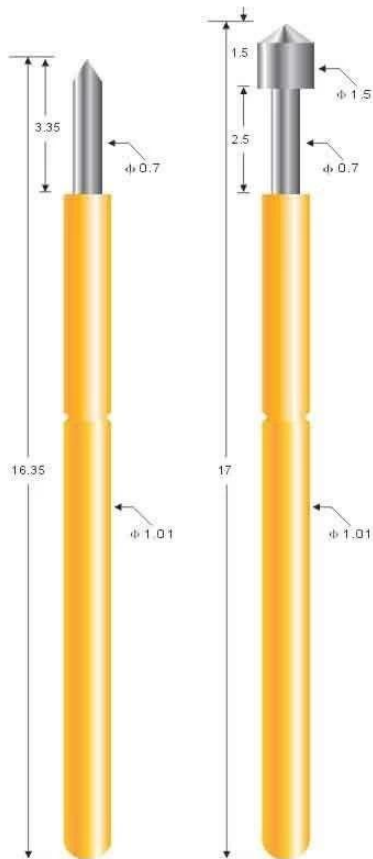


□□□□

□□□□	SFENG
□□□□	SF-P75
□□□□□□	□□
□□□	□□
□	SUS□□□□□□□□
□□□□□□	120□□□
□□□□	3.35□0.1319 "□/ 2.5□0.0984 "□
□□□□□	□3□a□
□□□□□	50□□□□W
□□□	1.90□0.0748 "□
□□□□□□	1.35□0.0532 "□/ 1.40□0.0551 "□
MOQ	100 □
□□□□□□	7 □□□□□□□□□□□□

□□□□□

SF-P75

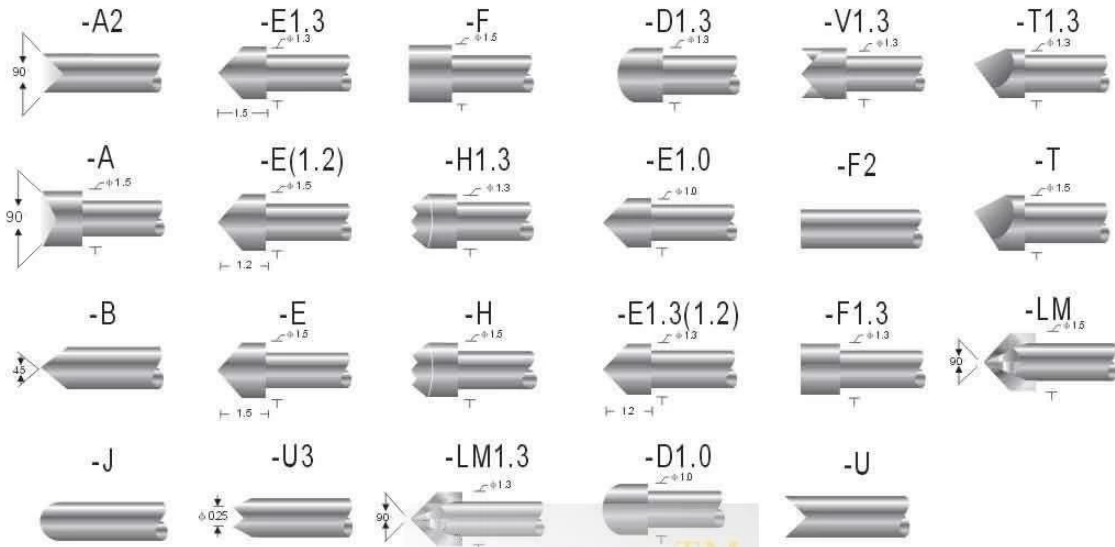

SF-P75-B

SF-P75-E

Probe specifications SF-P75(技术规格)

- Recommended minimum center(最小间距): 1.90mm(.0748")
- Mounting hole size(钻孔尺寸):
压克力: 1.35mm(.0532")
电木板、玻璃纤维板: 1.40mm(.0551")
- Full travel(行程): 3.35(.1319")/2.50(.0984")
- Spring force(弹簧压力): 120g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated; SK4, Rh plated
Barrel: Phosphor bronze, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)



chinapogopinsupplier.com

服务宗旨

1. 提供24小时售后服务
2. 提供OEM定制服务
3. 提供技术支持
4. 提供物流配送

产品

PCB ICT FCT 测试探针

提供24小时技术支持 & 服务

BGA 测试探针

