


規格



品名	SFENG
型番	SF-P111
材質	鋼
寸法	φ
重量	SUS
寸法	120
寸法	6.3±0.2481 mm
寸法	3a
寸法	50W
寸法	1.90±0.0748 mm
寸法	1.35±0.532 mm/ 1.40±0.0551 mm
MOQ	100
寸法	7

仕様

SF-P111

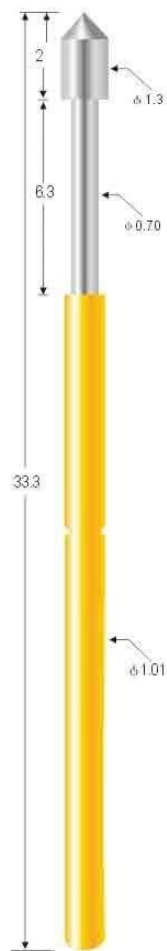

SF-P111-E

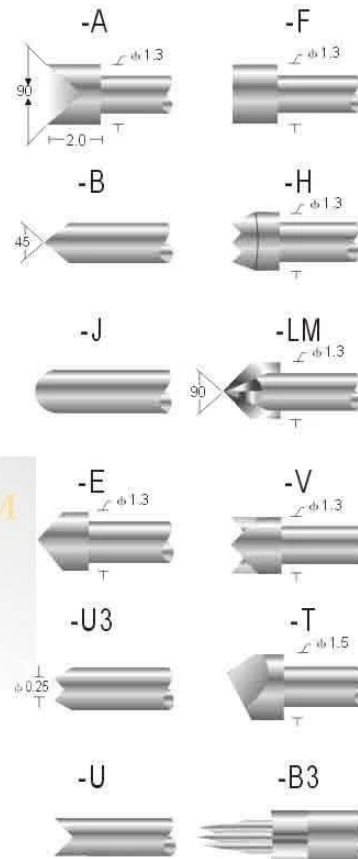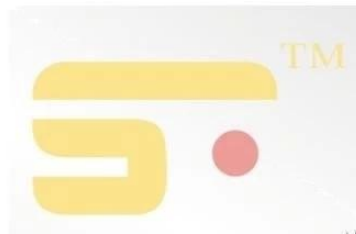

Probe specifications SF-P111(技术规格)

- Recommended minimum center(最小间距): 1.90mm(.0748 ")
- Mounting hole size(钻孔尺寸):
压克力: 1.35mm(.0532 ")
电木板、玻璃纤维板: 1.40mm(.0551 ")
- Full travel(行程): 6.3(.2481 ")
- Spring force(弹簧压力): 120g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

www.shengfengdz.com



chinapogopinsupplier.com

公司简介

1. 专业生产各种规格精密探针 24 小时服务热线
2. 专业生产各种规格精密探针 OEM 代工服务
3. 专业生产各种规格精密探针 质量保证 价格公道
4. 专业生产各种规格精密探针 质量保证 价格公道

产品

PCB ICT FCT 各种规格精密探针

专业生产各种规格精密探针 24 小时服务热线 质量保证 价格公道 & 服务; 专业生产各种规格精密探针

BGA 各种规格精密探针 质量保证

QZVZLM

;

&038; /

30OKPOM

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

