




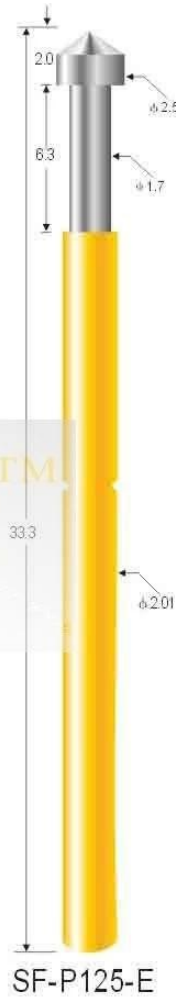
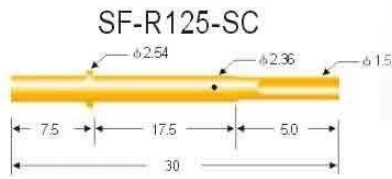
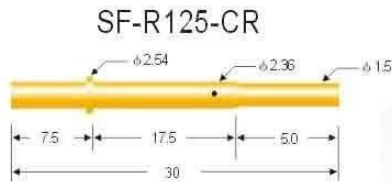
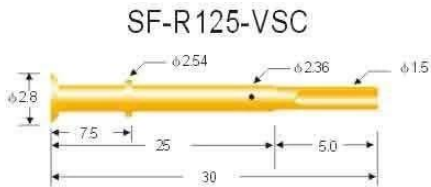


□□□□

□□□□	SFENG
□□□□	SF-P125
□□□□□□	□□
□□□	□□
□	SUS□□□□□□□□
□□□□□□	200□□□
□□□□	6.30□0.2480 "□
□□□□□	□5□a□
□□□□□	50□□□□W
□□□	3.17□0.1248 "□
□□□□□□	2.40□0.0945 "□/ 2.45□0.0965 "□
MOQ	100 □
□□□□□□	7 □□□□□□□□□□□□

□□□□□

SF-P125

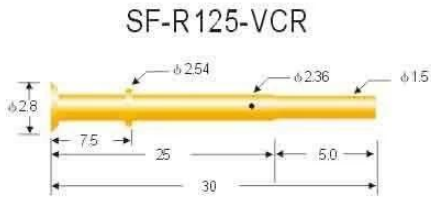

Probe specifications SF-P125(技术规格)

- Recommended minimum center(最小间距): 3.17mm(.1248")
- Mounting hole size(钻孔尺寸):
压克力: 2.40mm(.0945")
电木板、玻璃纤维板: 2.45mm(.0965")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated;
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connection(接线形式):
Crimp: R125-VCR, R125-CR
Solder cup: R125-VSC, R125-SC



chinapogopinsupplier.com

公司简介

1. 专业生产各种规格探针 24 小时服务热线
2. 承接 OEM 订单
3. 提供技术咨询
4. 提供售后服务

服务

PCB ICT FCT 测试

承接各种规格探针 24 小时服务热线 & 提供技术咨询

BGA 测试

