


□□□□



□□□□	SFENG
□□□□	SF-P111
□□□□□□	□□
□□□	□□
□	SUS□□□□□□□□
□□□□□□	120□□□□
□□□□	6.3□0.2481 "□
□□□□□	□3□a□
□□□□□	50□□□□W
□□□	1.90□0.0748 "□
□□□□□□	1.35□0.532 "□/ 1.40□0.0551 "□
MOQ	100 □
□□□□□□	7 □□□□□□□□□□□□

□□□□□

SF-P111

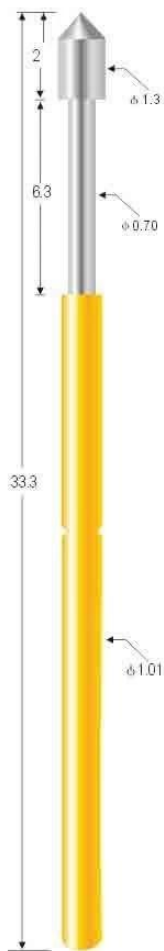

SF-P111-E

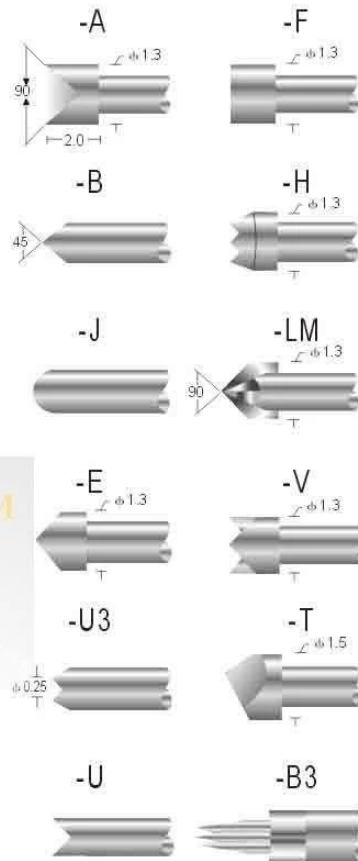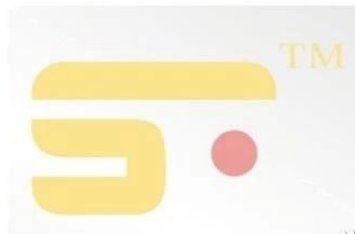

Probe specifications SF-P111(技术规格)

- Recommended minimum center(最小间距): 1.90mm(.0748")
- Mounting hole size(钻孔尺寸):
压克力: 1.35mm(.0532")
电木板、玻璃纤维板: 1.40mm(.0551")
- Full travel(行程): 6.3(.2481")
- Spring force(弹簧压力): 120g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated
Barrel: Brass, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50m Ω (毫欧姆)

www.shengfengdz.com



chinapogopinsupplier.com

公司简介

1. 专业生产各种规格探针 24 小时服务热线
2. 提供 OEM 定制服务
3. 产品广泛应用于 PCB、ICT、FCT 测试
4. 拥有完善的质量管理体系

产品

PCB、ICT、FCT 测试探针

提供 24 小时服务热线 & 在线客服; 产品广泛应用于 PCB、

BGA 测试探针、

