


□□□□

| | |
|--------|--------------------------------|
| □□□□ | SFENG |
| □□□□ | SF-P50 |
| □□□□□□ | □□ |
| □□□ | □□ |
| □ | SUS□□□□□□□□ |
| □□□□□□ | 100□□□ |
| □□□□ | 2.5□0.0984 "□ |
| □□□□□ | 1.5A |
| □□□□□ | 50□□□□W |
| □□□ | 1.27□0.0500"0 |
| □□□□□□ | 0.90□0.0354 "□/ 0.95□0.0374 "□ |
| MOQ | 100 □ |
| □□□□□□ | 7 □□□□□□□□□□□□ |


□□□□□

SF-P50

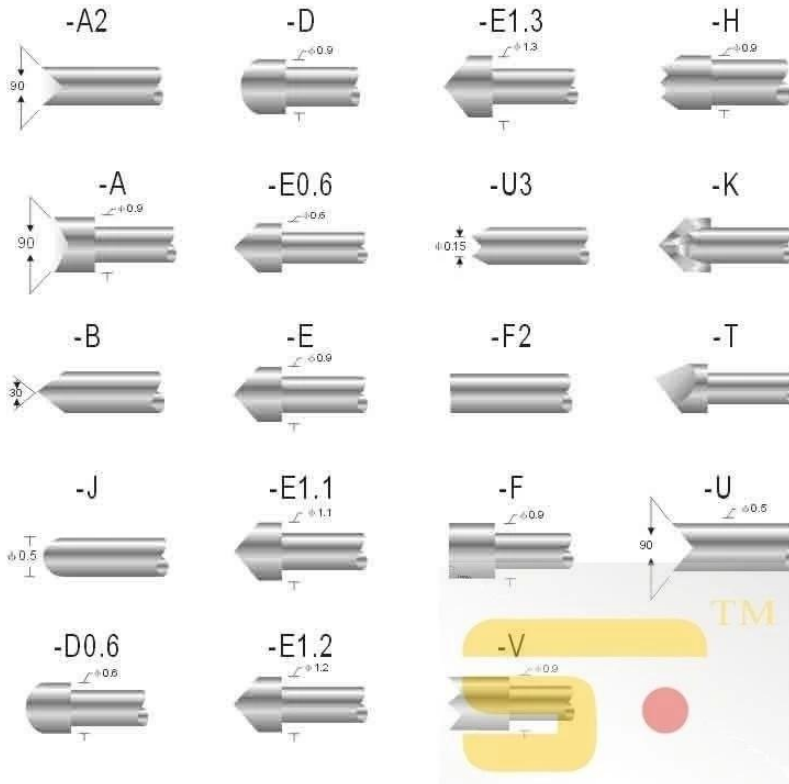

Probe specifications SF-P50(技术规格)

- Recommended minimum center(最小间距):
1.27mm(.0500 ")
- Mounting hole size(钻孔尺寸):
V: 0.90mm(.0354 ")
W: 0.95mm(.0374 ")
- Full travel(行程): 2.5(.0984 ")
- Spring force(弹簧压力): 100g
- Materials and finishes(材料及涂饰):
Plunger: Be Cu, Rh plated; SK4, Rh plated
Barrel: Phosphor bronze, Gold plated
Spring: Stainless steel
- Current ration(额定电流): 1.5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

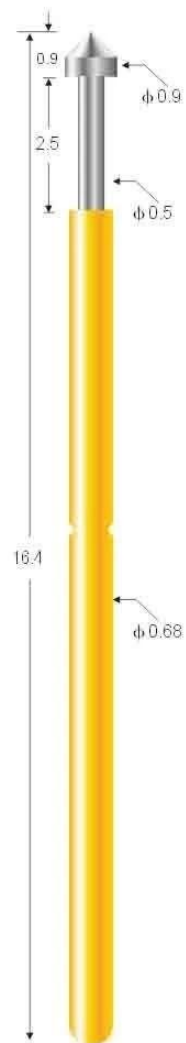

SF-P50-E



chinapogopinsupplier.com

公司简介

1. 专业生产各种规格探针 24 小时服务热线
2. 提供 OEM 定制服务
3. 产品广泛应用于 PCB、ICT、FCT 测试
4. 拥有完善的质量管理体系

产品

PCB、ICT、FCT 测试探针

产品广泛应用于 PCB、ICT、FCT 测试领域，品质可靠，交货及时。& 更多产品请咨询




BGA

QZVZLM

;

&038;

30OKPOM

| | | |
|---|---|--|
| Spring exhausted tester | DC power supply | Current resistance tester |
|  |  |  |
| Microscope | Tensile strength tester | Spring tester |
|  |  |  |

