

- 产品系列 SF-P030

ICT 产品系列 SF-P030

ICT 产品系列 PCB 产品系列 SF-P030

产品

Suzhou Shengyifui Electronic Technology Co., Ltd. 1984 年 30 年 15 年 ISO 9001

2010 年 PCB ICT SMT IC




Production Flow (生产流程)


**SFENG**  
The China's The World's

		
1. raw material warehouse	2. Lathe workshop	3. Assemble workshop
		
4. Quality inspection	5. Finished products	6. Packing


产品系列 SF-P030




SF-R030-VR



SF-R030-VRW



SF-RL030-VR

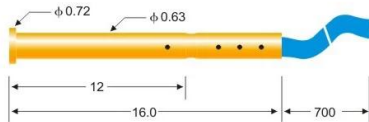

SF-RL030-VRW



-B




-U3



-J




-U




-E




-G2



-T



SF-P030-B



SF-PL030-B

## Probe specifications SF-P030 PL030(技术规格)

- Recommended minimum center(最小间距): 0.90m(.0354 ")
- Mounting hole size(钻孔尺寸): 0.65mm(.0256 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 60g(克)
- Materials and finishes(材料及涂饰):  
Plunger:SK4,Rh plated  
Barrel:Phosphor bronze,Gold plated  
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 150mΩ(毫欧姆)

### Receptacle specifications

Materials and finishes: Phosphor bronze,  
Gold plated

Noted: Specifications subject to change without notice(注: 规格变动不另行通知)




2. pogo

3.

4.

## Measuring Equipment >



### Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test