

参数

品牌	SFENG
型号	SF-P030
材料	黄铜镀镍Ni
硬度	HRC40-45
长度	60mm
直径	2.0mm
重量	1A
电阻	150mΩ
寿命	1.0M次
精度	0.75mm
MOQ	100 个
包装	7 个装一个盒子

认证

胜峰探针

SFENG

The China's The World's










chinapogopinsupplier.com

Probe specifications SF-P030 PL030(技术规格)

- Recommended minimum center(最小间距):
0.90mm(.0354 ")
- Mounting hole size(钻孔尺寸): 0.65mm(.0256 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 60g(克)
- Materials and finishes(材料及涂饰):
Plunger:SK4,Rh plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
- Current rating(额定电流): 1A(安培)
- Contact resistance(接触电阻): 150mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze,
Gold plated

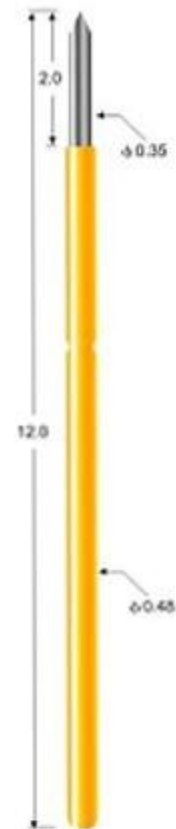

SF-P030-B

公司简介

- 1.Reply 24小时内with工程师
- 2.Customized 各种规格OEM各种规格
- 3.Delivery 各种规格各种规格
- 4.provide 各种规格各种规格

产品

---各种规格 PCB ICT FCT 各种规格

---各种规格 usually temporary 各种规格

各种规格 & 各种规格

interconnect Applications;

