


□□□□

□□□□	SFENG
□□□□	SF-P020-U
□□□□□□	□□□□□□□□□□□□□□Ni□□□
□□□	□□□□□□□□Ni□□□
□	SK4□□□□□□
□□□□□□	80□□□□
□□□□	2.0□□□□□□□□
□□□□□	1A
□□□□□□	120mΩ
□□□	1.0□□□□□□□□
□□□□□□	0.75□□□□□□□□
MOQ	100 □
□□□□□□	7 □□□□□□□□□□□□

□□□□□

chinapogopinsupplier.com

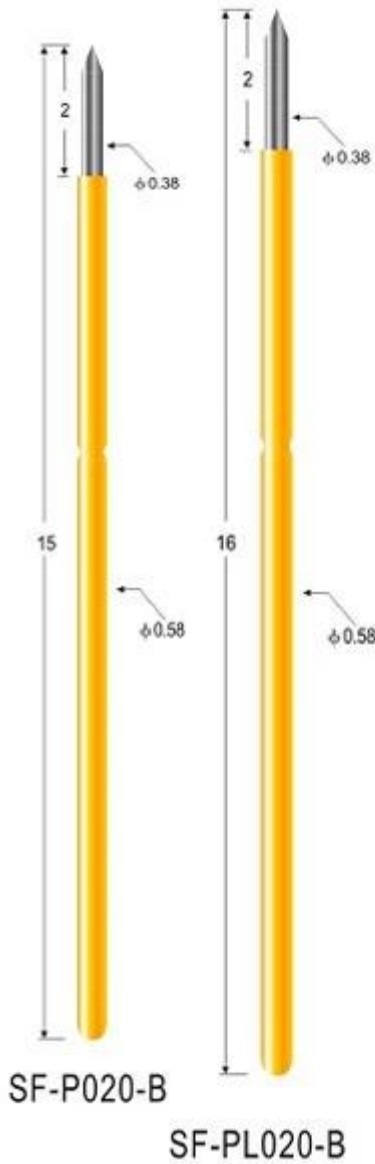

### Probe specifications SF-P020 PL020 (寸)

- Recommended minimum center(最小间距): 1.0mm(.0394 ")
- Mounting hole size(钻孔尺寸): 0.75mm(.0295 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 80g(克)
- Materials and finishes(材料及涂饰):  
Plunger:SK4,Rh plated  
Barrel:Phosphor bronze,Gold plated  
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 120mΩ(毫欧姆)

#### Receptacle specifications

Materials and finishes: Phosphor bronze, Gold plated

### □□□□□□

- 1.Reply 24□□□□with□□□□□□
- 2.Customized □□□□□□OEM□□□□□□□□
- 3.Delivery □□□□□□□□□□□□□□□□□□
- 4.provide □□□□□□□□□□□□□□□□

### □□□□

- PCB□ICT□FCT□□□□□□□□□□□□
- usuallytemporary□□□□□□□□□□□□□□□□
- &□□□□□□□□□□□□□□□□□□□□



