
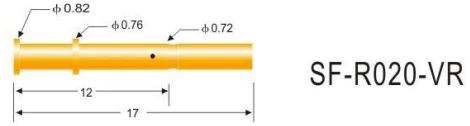



□□ □□

□□	SFENG
□□ ITerm □□	SF-P020
□□	□□ □□
□□ □□	7 □ □□□□ □


# SF-P020

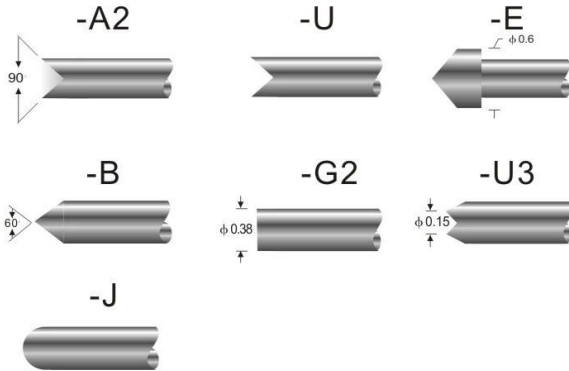


SF-R020-VR




SF-R020-VRW

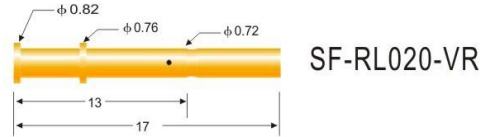

SF-RL020-VR

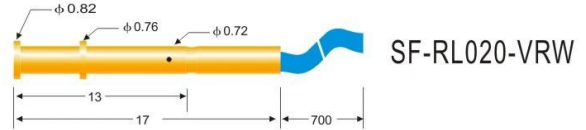

SF-RL020-VRW

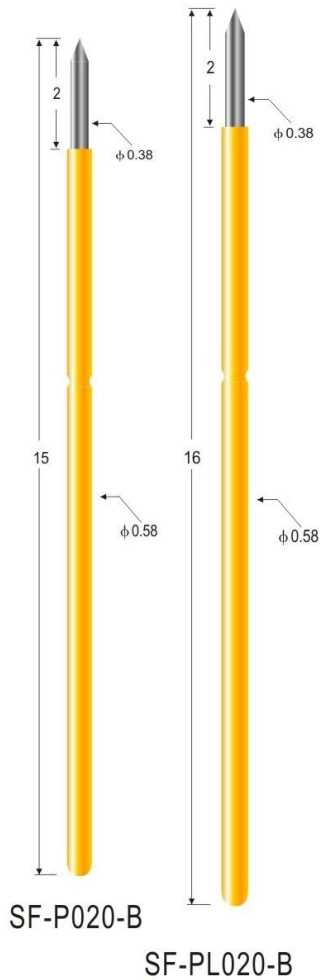

## Probe specifications SF-P020 PL020 (技术规格)

- Recommended minimum center(最小间距): 1.0mm(.0394 ")
- Mounting hole size(钻孔尺寸): 0.75mm(.0295 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 80g(克)
- Materials and finishes(材料及涂饰):  
Plunger:SK4,Rh plated  
Barrel:Phosphor bronze,Gold plated  
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 120mΩ(毫欧姆)

### Receptacle specifications

Materials and finishes: Phosphor bronze, Gold plated

SF-P020-J

**SFENG**  
The China's The World's

RoHS

QUALITY ASSURED FIRM  
ISO 9001  
SGS

CE

[WWW.SF-PROBE.COM](http://WWW.SF-PROBE.COM)

SF-P020-B

**SFENG**  
The China's The World's



[www.chinapogopinsupplier.com](http://www.chinapogopinsupplier.com)

## 關於我們

1. 我們提供 24 小時客戶服務。
2. 我們提供 OEM 服務。
3. 我們提供 24 小時客戶服務，並提供 24 小時客戶服務。
4. 我們提供 24 小時客戶服務，並提供 24 小時客戶服務。

## 我們提供

PCB, ICT, FCT 測試服務 (SMT);

□□ □ (□□□)□ □□ □□, □□□, □□□ & A□ □□ □ □□ □□ □□□ □□□ □□; A; A; □□ □□ □□□□;

BGA □□□ □□□□□□ □□ □□ □□□;



□ □□ □, QZ □ VZ □□□□ □ LM□□ □□ □;

□□ □□ □□□, □□□ □□□ □□ □□;

□□□ & A; A; A; □□□ / □□□;

□□ □□ □□ □□, □□□ # 30 OK, □□ □□ □□, POM, □ □□ □

□□ □□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
	