

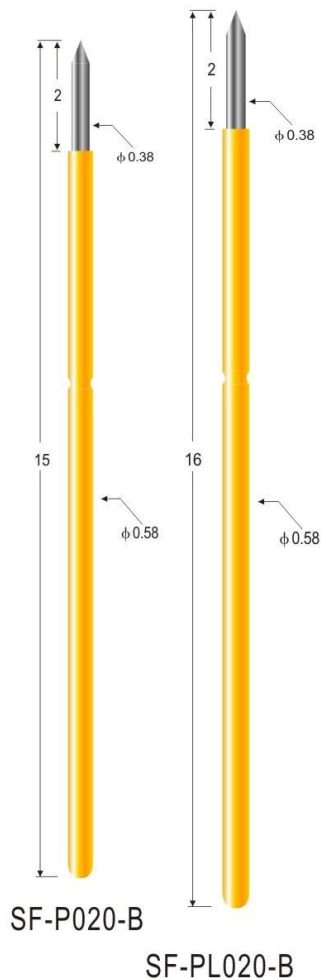



□□ □□

□□	SFENG
□□ ITerm □□	SF-P020
□□	□□ □□
□□ □□	7 □ □□□□ □


SF-P020

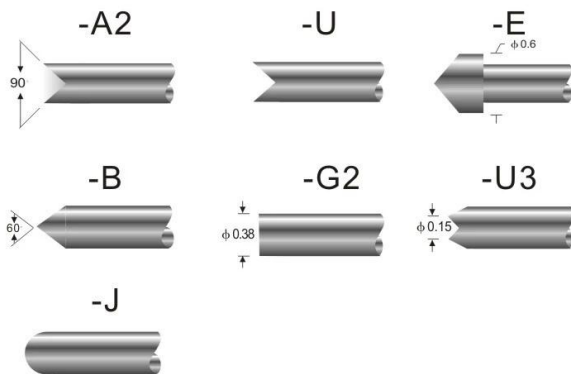


SF-R020-VR



SF-R020-VRW



SF-RL020-VR

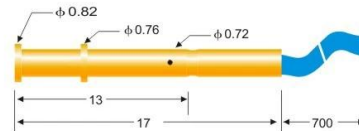

SF-RL020-VRW

Probe specifications SF-P020 PL020 (技术规格)

- Recommended minimum center(最小间距): 1.0mm(.0394 ")
- Mounting hole size(钻孔尺寸): 0.75mm(.0295 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 80g(克)
- Materials and finishes(材料及涂饰):
Plunger:SK4,Rh plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 120mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze,
Gold plated

SF-P020-J



SF-P020-B

SFENG
The China's The World's



www.chinapogopinsupplier.com

關於我們

1. 我們擁有超過 24 年的專業經驗。
2. 我們提供專業的 OEM 服務。
3. 我們擁有先進的生產設備和專業技術人員。
4. 我們擁有完善的质量管理体系。

服務範圍

PCB, ICT, FCT 等各種電子產品 (SMT);

鋼 鋼 (鋼鋼)鋼 鋼 鋼, 鋼鋼, 鋼鋼 & A鋼 鋼 鋼 鋼 鋼 鋼 鋼鋼 鋼鋼 鋼鋼 鋼; A; A; 鋼 鋼 鋼鋼鋼;
 BGA 鋼鋼 鋼鋼鋼鋼鋼 鋼 鋼 鋼鋼;
 鋼 鋼 鋼, QZ 鋼 VZ 鋼鋼鋼 鋼 LM鋼鋼 鋼 鋼;
 鋼 鋼 鋼鋼, 鋼鋼 鋼鋼 鋼 鋼;
 鋼鋼 & A; A; A; 鋼鋼 / 鋼鋼;
 鋼 鋼 鋼 鋼, 鋼鋼 # 30 OK, 鋼 鋼 鋼, POM, 鋼 鋼 鋼

鋼 鋼

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

