

□□□

□□	SFENG
□□	□□□ □□ □□ SF-KP 1.65 X 44
□□□	□□□
□	□□
□	□□□□□
□□□ □	□□□
□□ □□	5.0 mm
□□ □□	□□
□□ □□	□□
□□	□□
□□ □□	□□
MOQ	100
□□ □□	□□ □□ □ 15 □


□□ □□□

SFENG

The China's The World's



□□□ □□□ □□□ □□

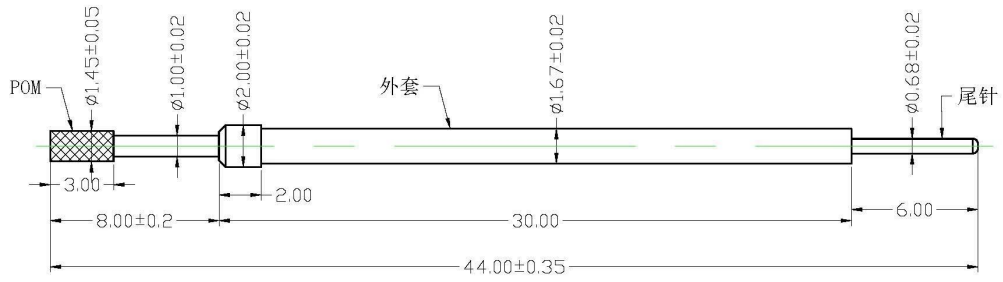

材质与弹力：
 1. 外套：黄铜镀金
 2. 针头：磷铜镀金
 3. 尾针：黄铜镀金
 4. 弹簧：不锈钢线

技术要求：
 1. 额定电流：3A
 2. 额定电阻：≤50mΩ
 3. 开关距离：1.0mm
 4. 开关弹力：100g±20g

				名称： SF-开关针1.67X44-G塑料头				胜峰科技	
								说明： 1. 所有尺寸单位为mm 2. 未注图示尺寸公差：按GB1804-79 11级精度执行	
标记	处数	更改文件号	签字	日期	图样	标记	视图	质量	比例
设计					S	A	⊙		1:1
校对									
审核			HJQ						图纸编号：
工艺				日期	共	1	页	第	1
				2019-9-19					

□□ □□

- □□.
- □□ □□□□□.
- □□ □□ □ □□ □□.
- □□ □□.

□□ □□

PCB, ICT, FCT □□□□ □□□□ □ (□□);

□□, □□□□, □□□, □□□ □ □□□□□□ 2 □□ □□ □□ □□ □□□ □□□□□ □□□ □ (□□□); □□ □□ □□□□□□;

BGA □ □□□ □□□ □□ □□ □□□;

□□ □ □□□ □□, □□□□ □□, LM □ QZ □ VZ □□□;

□□□ □□□, □□□ □□□, □□□□ □□;

□□□ □□□; □□ / □□;

□□ □□ □□ □□, 30 # OK □□, □□ □□, POM, □ □□ □

□□ □□



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop




4. Quality inspection




5. Finished products



6. Packing



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

