


10A 10A 10A 10A 10A SF-PPA9.0 BY 29MM

10A 10A

10A	SFENG
10A 10A	10A SF-PPA9.0 * 29-G
10A	10A
MOQ	100 10A
10A 10A	10A 10A 7 10A 10A

10A 10A



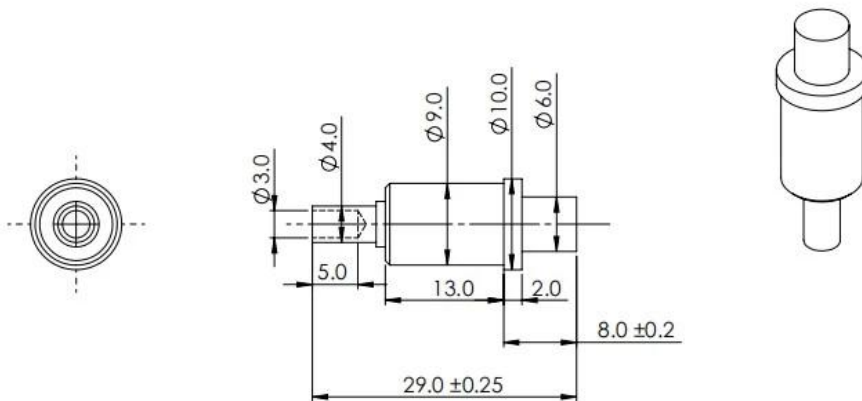

Material:
Barrel: Brass, Ni Plated
Plunger : Brass, Au on Ni plated
Spring : SUS

Specifications:

Current Rating : 10A
Full stroke: 6mm
Rated stroke : 4mm
Spring force: 320 +/-10% @load 4mm.

□□ □□

1. □□ 24 □□ □□ □□ □□.
2. □□ □□ □□□□ □□□□ □□□□ OEM □□□□□□.
3. □□ □□ □ □□ □□□□ □□□□ □□ □ □□□□□.
4. □□ □□ □□□□□□□□ □□ □□ □□ □□□□ □□□□ .

□□ □□

PCB, ICT, FCT □□ □□□□ □□□ □□ □ (□□);

□□, □□□ □, □□□, □□□ □ □□□□□□ □□□□□□ □□ □ □□ □□ □□ □□ □□□□ □□ □ (□□□);

BGA □ □□□ □□□□□□ □□ □□ □□□;


□□□□□□ □□ □, □□ □, QZ □ VZ □□□□ LM □;

□□□ □□□, □□□ □□□, □□□□□ □□;

□□□ □ □□□□ / □□;

□□ □□ □□ □□, 30 # OK □□□□, □□ □□ □□, POM, □ □□ □

□□ □□

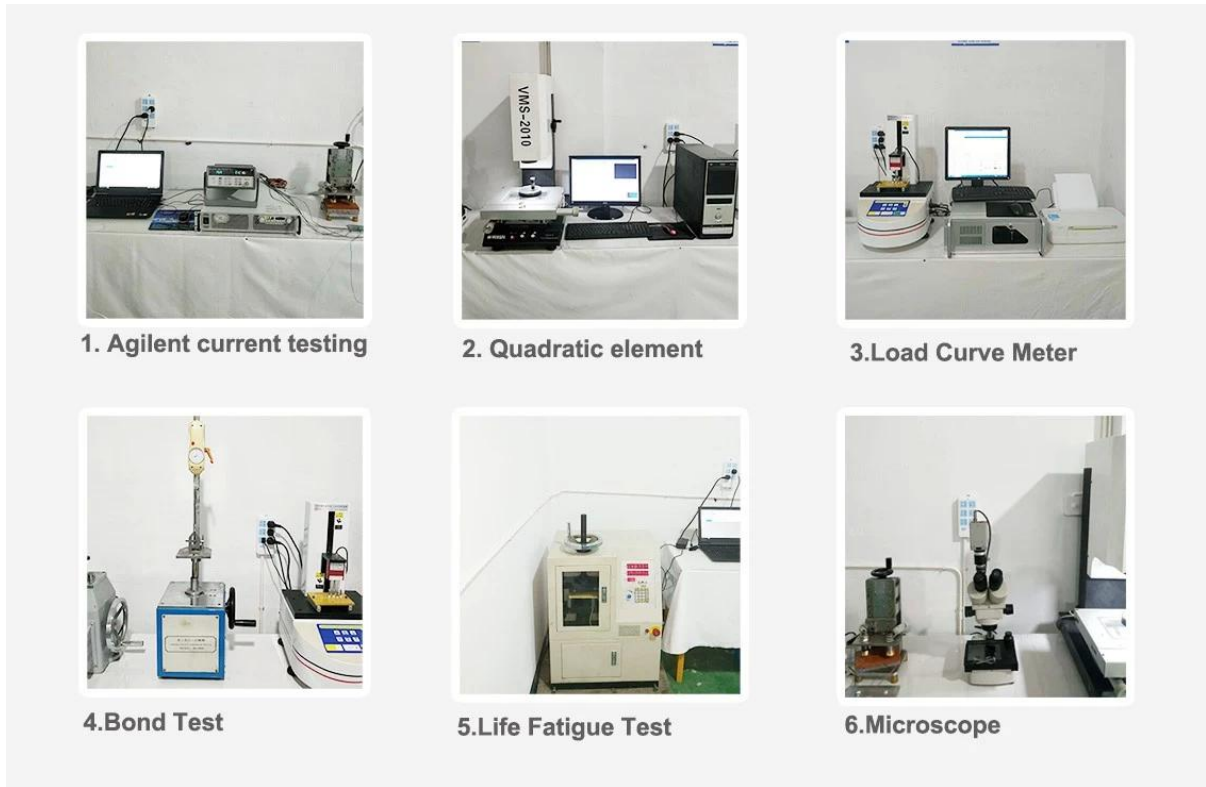

□□ □□

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

