

000

00	SFENG
00	000 000 SFM265
000	000 00
00	00
0	00000
000 0	000
00 00	5.3mm
00 00	00
00 00	00
00	00
00 00	00
MOQ	100
00 00	00 00 7 0

00 000
















SFENG
The China's The World's




□□□ □□□ □□□ □□□



SF-M265

可选用的针头形式					
材料	针头类型	针头 电镀	特殊版本	特殊版本	
				Φ	Φ (inch)
AU	A 	φ 2.5	A	3.0 4.0	
AU	B 	φ 1.8	N		
AU	H 	φ 2.3	A	2.5 3.0 4.0	
AU	H1 	φ 3.5	A		
AU	J1 	φ 1.0	N		
AU	J 	φ 1.8	A		
AU	D 	φ 2.3	N	2.5	
AU	D1 	φ 3.0	A		
AU	G1 	φ 1.8	A		
AU	G 	φ 2.3	A	2.5 3.0 4.0	
AU	V 	φ 2.3	N	2.5 4.0	
AU	T 	φ 2.5	N	3.0 4.2	
AU	LM 	φ 1.8	N	3.0	

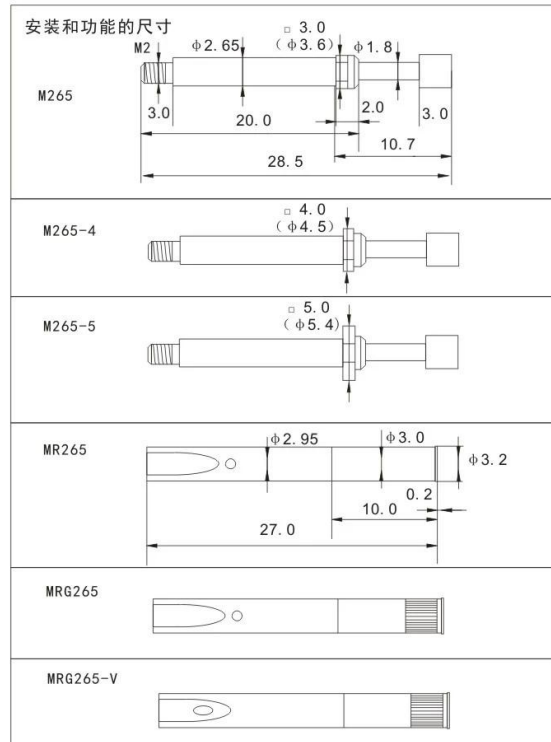

用来测试电缆束的探针
螺钉，螺丝 螺纹设计
可用的螺旋工具

技术参数

间距: 4.00 mm/160 mil
 全行程: 5.50 mm
 工作行程: 4.40 mm
 预装弹力: 0.20/0.20/0.40/0.50/0.80/0.70 N
 在工作行程下的弹力: 0.40/0.60/1.50/2.25/3.00/5.00 N

电气数据

电流: 5.0...8.0A
 电阻: ≤30 mOhm

材质

针管: 黄铜, 镀金
 弹簧: 不锈钢
 针杆: 镀铜, 镀金
 套管: 黄铜, 镀金

推荐的钻孔直径

HP2361.1 (保温, 隔热材料) 3.00 mm
 HGW2372 (玻璃棉, 玻纤棉) 3.01 mm



1. □□ □□.

- 2. 鋼材 鋼 鋼鋼鋼鋼.
- 3. 鋼 鋼 鋼 鋼 鋼 鋼.
- 4. 鋼鋼鋼 鋼 鋼.

鋼 鋼

PCB, ICT, FCT 鋼鋼鋼 鋼鋼鋼鋼 鋼 (鋼);

鋼, 鋼鋼鋼, 鋼鋼, 鋼鋼 鋼 鋼鋼鋼鋼鋼 2 鋼 鋼 鋼 鋼 鋼鋼 鋼鋼 鋼鋼鋼鋼鋼 鋼鋼 鋼 (鋼鋼); 鋼 鋼 鋼鋼鋼鋼鋼;

BGA 鋼 鋼鋼 鋼鋼 鋼 鋼 鋼鋼;

鋼 鋼 鋼鋼 鋼, 鋼鋼 鋼, LM 鋼 QZ 鋼 VZ 鋼鋼;

鋼鋼 鋼鋼, 鋼鋼 鋼鋼, 鋼鋼鋼 鋼;

鋼鋼 鋼鋼; 鋼 / 鋼;

鋼 鋼 鋼 鋼, 30 # OK 鋼, 鋼 鋼, POM, 鋼 鋼 鋼

鋼 鋼



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products




6. Packing

鋼 鋼



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

