

- 關於 3 吋 030 SF-P030 產品

ICT 產品 3 吋 030 產品 3 (3 吋 030 產品 030) 產品。 3 吋 030 產品, 3 吋 030 產品。 3 吋 030 產品 3 吋 030 產品。

ICT 產品 3 吋 030 PCB 3 吋 030 產品 3 吋 030 產品 3 吋 030 產品 3 吋 030 產品。 3 吋, 3 吋, 3 吋 3 吋 3 吋 3 吋 3 吋, 3 吋, 3 吋 3 吋, 3 吋 3 吋 3 吋 3 吋 3 吋 3 吋 3 吋 3 吋 3 吋。

3 吋 3 吋

SuzhouShengyifurui 3 吋 Co., 3 吋 3 吋 3 吋 3 吋 pinsupplier。 3 吋 1984 3 吋 3 吋 Cixi 3 吋 3 吋 3 吋。 3 吋 30 3 吋 3 吋 3 吋 15 3 吋 3 吋 3 吋。 3 吋 ISO 90001 3 吋 3 吋 3 吋 3 吋。

3 吋 Suzhouin 2010 3 吋 3 吋 3 吋。 3 吋 3 吋 3 吋 3 吋 3 吋 3 吋 3 吋 3 吋 3 吋 3 吋。 3 吋 3 吋, 3 吋, 3 吋, 3 吋 3 吋 3 吋。 3 吋 PCB, ICT, SMT, IC 3 吋 3 吋。 3 吋 3 吋 3 吋 3 吋 3 吋 3 吋 3 吋。




Production Flow (生产流程)

SFENG


The China's The World's

1. raw material warehouse	2. Lathe workshop	3. Assemble workshop
4. Quality inspection	5. Finished products	6. Packing


關於 3 吋 030 SF-P030 產品




SF-R030-VR

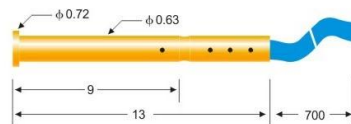





SF-R030-VRW




SF-RL030-VR

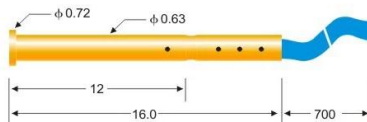

SF-RL030-VRW

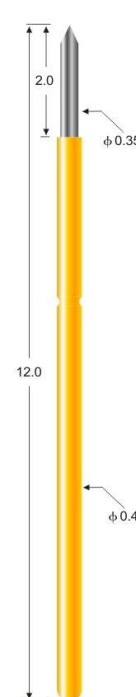

SF-P030-B



SF-PL030-B

Probe specifications SF-P030 PL030(技术规格)

- Recommended minimum center(最小间距): 0.90m(.0354 ")
- Mounting hole size(钻孔尺寸): 0.65mm(.0256 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 60g(克)
- Materials and finishes(材料及涂饰):
Plunger:SK4,Rh plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 150mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze,
Gold plated

Noted: Specifications subject to change without notice(注: 规格变动不另行通知)

-6-

□□□ □□ □□


1. PCB, ICT, FCT □□□ □

2. 0.1% 0.01%

3. 0.1% 0.01% 0.001% 0.0001%

4. 0.1% 0.01% 0.001% 0.0001%

Measuring Equipment >



Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test