

25 毫米 ICT 钻头 SF-PA100-H3.0

规格


品牌	SFENG
规格	SF-P100 钻头
长度	250 毫米
直径	25 毫米 7 毫米



SF-P100




SF-P100-E

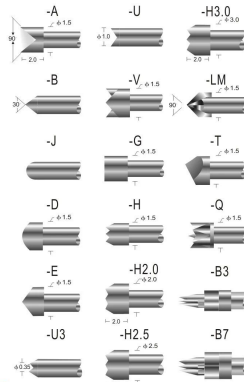

Probe specifications SF-P100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000")
- Mounting hole size(钻孔尺寸): 压克力: 1.70mm(.0670") 电木板、玻璃纤维板: 1.75mm(.0689")
- Full travel(行程): 6.40(.2520")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰): Plunger: Be Cu, Rh plated; SK4, Rh plated Barrel: Brass, Gold plated Spring: Stainless steel
- Current rating(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

SF-R100

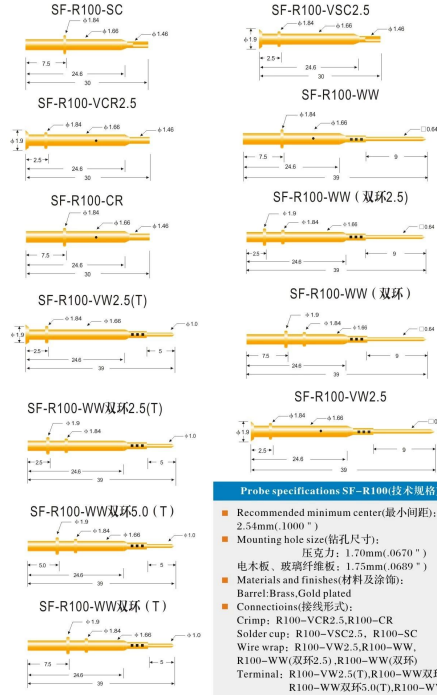

Probe specifications SF-R100(技术规格)

- Recommended minimum center(最小间距): 2.54mm(.1000")
- Mounting hole size(钻孔尺寸): 压克力: 1.70mm(.0670") 电木板、玻璃纤维板: 1.75mm(.0689")
- Materials and finishes(材料及涂饰): Barrel: Brass, Gold plated
- Connections(接线形式): Crimp: R100-VCR2.5, R100-CR Solder cup: R100-VSC2.5, R100-SC Wire wrap: R100-VW2.5, R100-WW, R100-WW(双环2.5), R100-WW(双环)
- Terminal: R100-VW2.5(T), R100-WW双环2.5(T), R100-WW双环5.0(T), R100-WW双环(T)

□□□ □□□

1. □□□ 24 □□ □□ □□□ □□ □ □ □□□□.
2. Customized design □ □□□ OEM □ □□□□□.
3. □□□ □□ □ □□ □□□□ □□□ □□ □ □ □□□□.
4. □□□ □□□□ □□□□ □□□ □□ □□□□ □□ □ □ □□□□.

□□ □□

PCB, ICT, FCT □□□ □□□□ □□□ □□ □ (□□);

□□, □□ □□, □□□□, □□□□ □ □□□□□□ □□□□□□ □□ □ □□ □□ □□ □□□□ □□ □ (□□□);


BGA □ □□□ □□□ □ □□ □□ □□□;

□□□□□ □□ □, □□ □, QZ □ VZ □□□□ LM □;


□□□ □□□, □□□ □□□, □□□□□ □□;

□□□ □ □□□□ / □□;

□□ □□ □□ □□, 30 # OK □□□□, □□ □□ □□, POM, □ □□ □



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

