



SFENG
The China's The World's

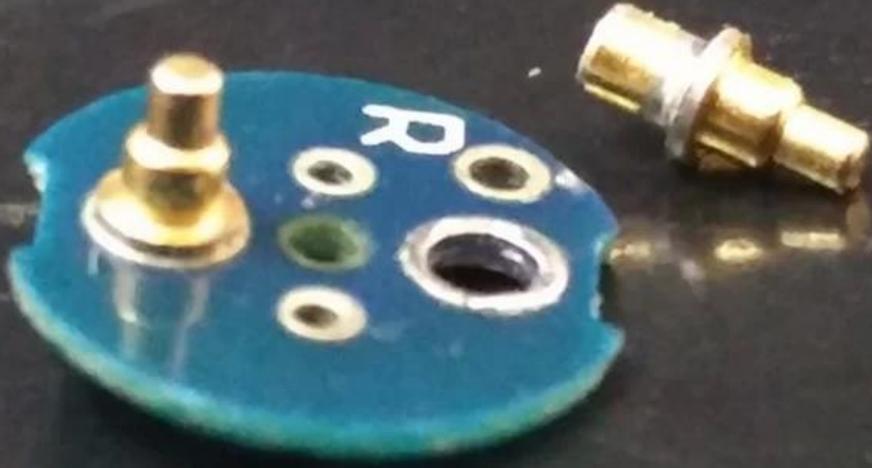

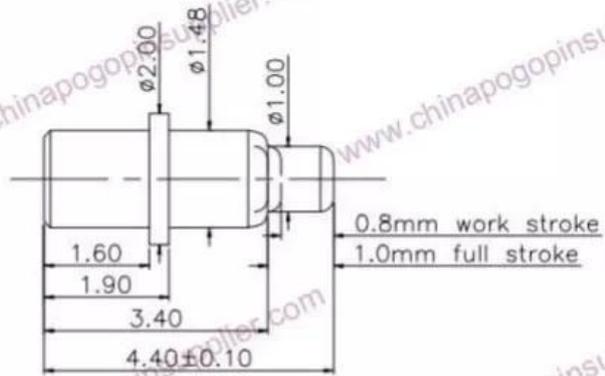

NOTE:

1. Material

Plunger: Brass C3604

Barrel: Brass C3604

Spring: SUS 304

2. Plating

10micro inch minimum Au over 60-100micro inch nickel

3. Electrical

Rated current & voltage: 24V 2A (PEAK 3A)

Contact resistance: 100mohm maximum at working height (quiescence)

4. Mechanical

Single pin spring force: $150 \pm 20\%$ g at normal working height

Durability: 10000 cycles minimum

5. To ensure the best usage, please operate it based on the working height

6. RoHS and HF compliant product



SFENG 连接器 产品 目录

我们 Shengyifurui 提供各种类型的连接器 & Pogo 连接器产品，提供快速交付。我们提供
各种规格的产品，满足不同客户的需求，我们通过了 ISO9001 质量管理体系认证 - 2008 年，并符合
RoHS 环保标准。

联系我们

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□

