


□□ □□

□□□	SFENG
□□ □□	SF-P058-B
□□	Ni □□ □□ □□ □□
□□ □□	7 □□ □ □□□ □□ □

□□ □□

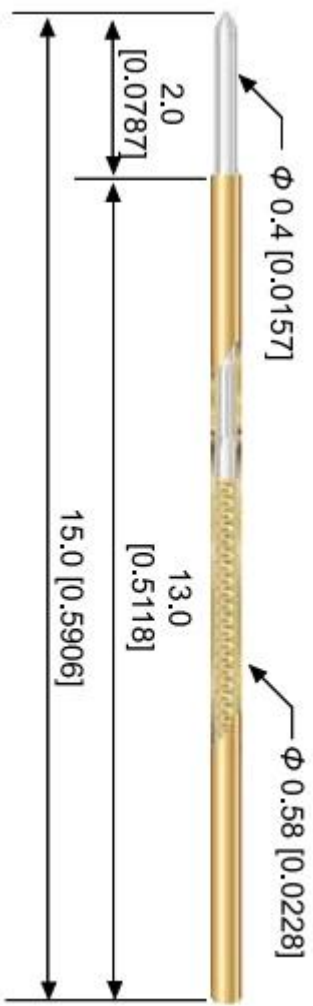

- 針軸 Plunger
- 高碳鋼鍍金
- SK4 with Gold Plated
- 內管 Barrel
- 磷青銅鍍金
- Phosphor Bronze with Gold Plated
- 彈簧 Spring
- 琴鋼線鍍金
- Music Wire with Gold Plated
- 外管 Receptacle
- 磷青銅鍍金
- Phosphor Bronze with Gold Plated
- 最小中心距 Min. Pitch
- 1.0mm [0.0394]
- 彈力最大行程
- Spring Force @ Full Stroke
- 60g[2.12 oz]±20% @ 2.0mm[0.079]
- 2/3彈力行程
- Spring Force @ 2/3 Stroke
- 45g[1.59 oz]±20%
- 額定電流 Current Rating
- 1A Continuous
- 接觸阻值 Contact Resistance
- 150 mΩ

□□□ □□□

1. □□ □□ □ □□ 24 □□ □□ □□□ □□

2. 000 00 000 00 00 OEM 00 00.
3. 00 000 0 0000. 00 000 00 000 000 0 000 0.
4. 000 000 0 0000. 000 000000 0 00 000 000 00 00.

00 00

Pcb, 00 00, 00 0 (00) 0 FCT 000 0;

00 0 (000) 00, 00, 000, 000 0 00 00 0000; 0 0 0 00 00 00 000 00

BGA 0 000 000; 00 00 000






0, 00 0, QZ 0 VZ 000; LM 0 00 00 0

00 00 000, 000 00, 000000 00;

000 & 00 /socket;

00 000 00 00, 30 # 00 000, 0 0 00, POM, 0 00 0

00 00

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□ □ □ □

