


□□ □□

□□ □□	SF5150
□□ □□□	3A
□□ □□	50mΩ
□□ □□	5.7mm
□□ □□□□	4.0mm
□□□ □	150±20%gf@ □□ 4.0mm
MOQ	100PCS
□□	□/□
□□ □□	□□□□ □□ □ 5~10□

□□ □□

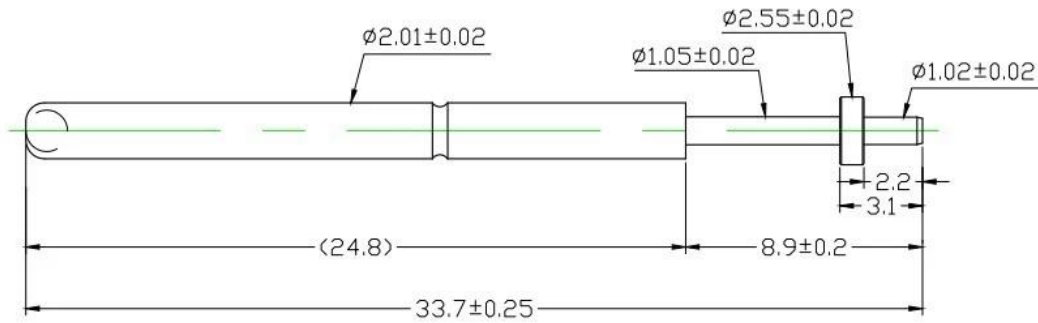

Materials(Plated) (材質與鍍層):  
 Barrel(針套) : Brass(黃銅) , Au on Ni Plated  
 Plunger(針軸) : Fe(易車鐵) , Ni Plated  
 Spring(彈弓) : SUS (不銹鋼線) , /

Specifications (技術要求):  
 Current Rating(額定電流) : 3A  
 Contact Resistance(接觸電阻) : ≤50mΩ  
 Full Stroke(滿沖程) : 5.7mm  
 Rated Stroke(額定沖程) : 4.0mm  
 Spring Force(額定彈力) : 150±20%gf@ load 4.0mm

				名称:		胜峰科技	
				SF-P125-G1.02X2.2(L33.7)-HAT-61		说明:	
						1. 所有尺寸单位为mm	
						2. 未注图示尺寸公差:按GB1804-79 11级精度执行	
标记	处数	更改文件号	签字	日期	图样标记	视图	质量
设计					S	A	比例
校对					⊕		/
审核			制图	HJQ	图纸编号:		
工艺			日期	2019-7-20	共 1 页	第 1 页	

□□ □□



1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing



## Measuring Equipment >



### Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test





## 〇〇 〇〇

- 1. PCB, ICT, FCT 〇〇 〇〇 〇〇 〇〇 〇(〇〇);
  - 2. 〇〇, 〇〇 〇〇, 〇〇〇, 〇〇〇 〇 〇〇〇〇〇 〇〇〇〇〇〇〇〇 〇〇 〇 〇〇 〇〇〇 〇〇 〇〇 〇〇〇 〇〇〇 〇〇〇〇 〇〇 〇(〇〇〇);
  - 3. BGA 〇 〇〇〇 〇〇〇〇 〇〇 〇〇 〇〇 〇〇〇;
  - 4. 〇〇〇〇 〇〇 〇〇 〇, 〇〇 〇, QZ 〇 VZ 〇〇〇〇 〇〇 LM 〇;
  - 5. 〇〇〇〇 〇〇〇, 〇〇〇 〇〇〇, 〇〇〇〇〇 〇〇;
  - 6. 〇〇〇 〇 〇〇〇/〇〇;
  - 7. 〇〇 〇〇 〇〇 〇〇, 〇〇 〇〇 〇〇, POM 〇 〇.
- 〇〇〇 〇〇〇〇 〇〇 〇〇 〇〇〇〇 〇〇〇〇 〇〇〇〇. 〇〇〇 〇〇〇 〇〇 〇〇〇 〇〇〇 〇〇 〇〇〇 〇〇〇〇〇〇 〇〇 〇〇〇 〇〇 〇〇〇〇.

## 〇〇〇 〇〇〇

- 1. 〇〇〇 〇〇〇 〇〇〇 〇〇〇〇 24〇〇 〇〇〇 〇〇〇 〇〇 〇 〇〇〇〇.
- 2. 〇〇〇 〇〇〇〇 〇〇〇〇 OEM 〇〇〇〇〇.
- 3. 〇〇〇 〇 〇〇 〇〇〇〇 〇〇〇 〇〇〇〇 〇〇〇 〇〇 〇〇〇 〇 〇〇〇〇.
- 4. 〇〇〇〇 〇〇〇〇 〇〇〇〇 〇〇〇 〇〇 〇〇〇〇 〇〇〇 〇 〇〇〇〇.