


□□ □□

□□ □□	SF5797
□□□□□	5.0mm
□□ □□□□	4.0mm
□□□□	300±20%gf@10ad 4.0mm
□□□□ □□	1.5±0.2mm
□□□□	BeCu, Au on Ni □□
□□	Ph, Au on Ni □□
□□ □□	BeCu, Au on Ni □□
□□	SWP
□□□□ □□	OEM& ODM
MOQ	100PCS
□□□□	Plastic bag, carton box
□□□	□□ □ 100% T/T
□□ □□	□□□ □□ □ 5-10□

□□ □□

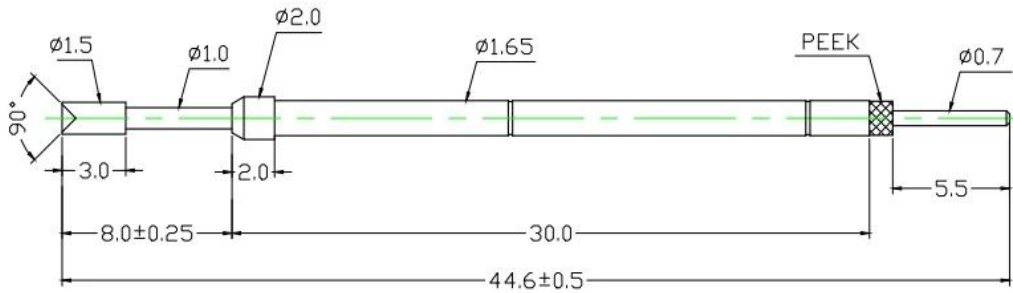

Specifications (技術要求) :

Full Stroke (滿冲程) : 5.0mm
Rated Stroke (額定冲程) : 4.0mm
Spring Force (額定彈力) : 300±20%gf@ load 4.0mm
Switching Path (开关距离) : 1.5±0.2mm

Materials (plated) (材質與鍍層) :

Barrel (針套) : Ph (磷銅) , Au on Ni Plated
Plunger (針軸) : BeCu (鍍銅) , Au on Ni Plated
Tail pin(尾針) : BeCu (鍍銅) , Au on Ni Plated
Spring (彈弓) : SWP (琴線) , Au on Ni Plated

□□ □□



1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products



6. Packing



Measuring Equipment >



Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test





□□ □□

1. PCB, ICT, FCTtesting □□ □□ □□ □□ □(□□);
 - 2.Pogo'□(□□□) to'setup'connection between two'printed'circuit'boards' for'charging,locating,locating,battery,semiconductor&interconnector'applications;
 - 3.'BGA' □ '□□□' □□□□ □□ □□'□□□'
 - 4.Universal'pin'without'spring,coating'pin,LM'pin'with'QZ'and'VZ'series;
 5. □□□ □□□, □□□ □□□, □□□□□ □□;
 - 6.Terminal&receptacle/socket;
 7. □□ □□ □□ □□, □□□, POM □
- □□ □□□□ □□ □□ '□□□□' □□□ □□□ □□ □□□□'□ □□□□□ □□ □□□ □□□□□□.

□□□ □□□

1. □□□ 24□□ □□ □□ □□□ □□□ □□□ □ □□□□.
- 2.Customized'design'□'available'□□'OEM'□'□□□□□□.
- 3.□□□ □□□ □□□□ □ □□ □□□□ □□□ □ □□□□.
4. □□□ □□□□ '□□□□' □□□□ '□□' □□□□ □□□ □ □□□□.