□□ □□

□□ □□	SF5797
□□□□□	5.0mm
□□ □□□□	4.0mm
□□□□	300±20%gf@10ad 4.0mm
□□□ □□	1.5±0.2mm
□□□	Becu, Au on Ni □□
□	Ph, Au on Ni □□
□□ □	Becu, Au on Ni □□
□	SWP
□□□ □□	OEM& ODM
MOQ	100PCS
□□□	Plastic bag, carton box
□□	□□ □ 100% T/T
□□ □□	□□□ □□ □ 5-10□

□□ □□

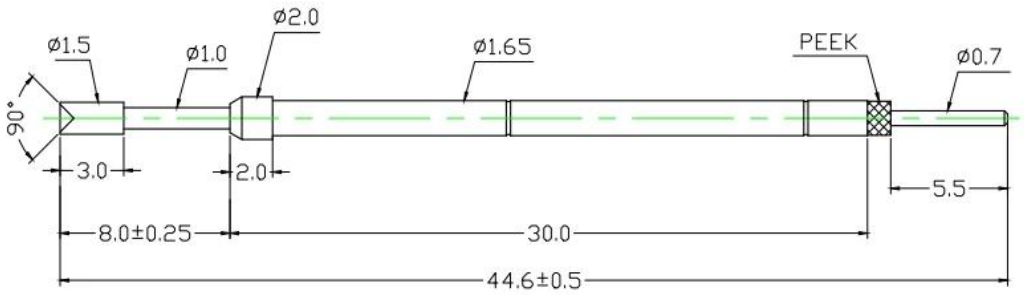

Specifications（技術要求）：
Full Stroke（滿沖程） ：5.0mm
Rated Stroke（額定沖程） ：4.0mm
Spring Force（額定彈力） ：300±20%gf@ load 4.0mm
Swithching Path（开关距离）：1.5±0.2mm

Materials（plated）（材質與鍍層）：
Barrel（針套） ：Ph（磷銅） ，Au on Ni Plated
Plunger（針軸） ：BeCu（铍銅） ，Au on Ni Plated
Tail pin(尾針) ：BeCu（铍銅） ，Au on Ni Plated
Spring（彈弓） ：SWP(琴线) ，Au on Ni Plated

□□ □□

Production Flow (生产流程)

SFENG
The China's The World's

1. raw material warehouse

2. Lathe workshop

3. Assemble workshop

4. Quality inspection

5. Finished products

6. Packing

Measuring Equipment

Measuring Equipment:

1. Agilent current testing;
2. Quadratic element measurement
3. Load Curve Meter
4. Bond Test
5. Life Fatigue Test

□□ □□

1. PCB, ICT, FCTtesting □□ □□ □□□ □□ □(□□);
2.Pogo'□(□□□) to'setup'connection between two'printed'circuit'boards' for'charging,locating,locating,battery,semiconductor&interconnector'applications;
3.'BGA' □ '□□□' □□□□ □□ □□'□□□'
4.Universal'pin'without'spring,coating'pin,LM'pin'with'QZ'and'VZ'series;
5. □□□ □□□, □□□ □□□, □□□□□ □□;
6.Terminal&receptacle/socket;
7. □□ □□ □□ □□, □□□, POM □

□□□ □□ □□□□ □□ □□ '□□□□' □□□ □□□ □□ □□□ '□□□□'□ □□□□□ □□ □□□ □□□□□□.

□□□ □□□

1. □□□ 24□□ □□ □□ □□□ □□□ □□□ □□□ □ □□□□.
2.Customized'design'□'available'□□'OEM'□'□□□□□.
3.□□□ □□□ □□□□ □ □□ □□□□ □□□ □□ □□□ □ □□□□.
4. □□□ □□□□ '□□□' □□□ '□□' □□□□ □□□ □ □□□□.