

□□ □□

□□	SFENG
□□ □□	□□□ □□□ SF-P125-H
□□	□□ □□ □□ □□□
□□ □□	□□□□□ □ □□□ □□ 7 □

□□ □□



胜峰探针
SFENG
The China's The World's

RoHS

QUALITY ASSURED FIRM
ISO 9001
SGS



CE

chinapogopinsupplier.com

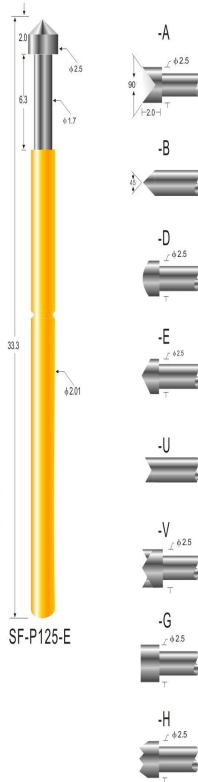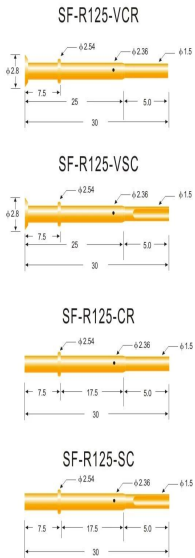

Probe specifications SF-P125(技术规格)

- Recommended minimum center(最小间距): 3.17mm(.1248")
- Mounting hole size(钻孔尺寸): 压克力: 2.40mm(.0945") 电木板、玻璃纤维板: 2.45mm(.0965")
- Full travel(行程): 6.30(2480")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰): Plunger: Be Cu, Rh plated; Barrel: Brass, Gold plated; Spring: Stainless steel
- Current ration(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式): Crimp: R125-VCR, R125-CR; Solder cup: R125-VSC, R125-SC

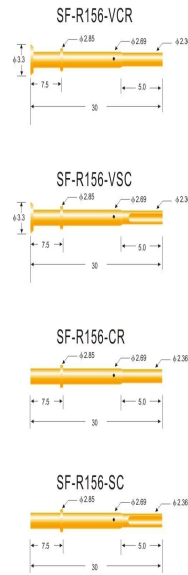

Probe specifications SF-P156(技术规格)

- Recommended minimum center(最小间距): 4.75mm(.1870")
- Mounting hole size(钻孔尺寸): 压克力: 2.75mm(.1083") 电木板、玻璃纤维板: 2.80mm(.1102")
- Full travel(行程): 6.30(2480")
- Spring force(弹簧压力): 250g
- Materials and finishes(材料及涂饰): Plunger: Be Cu, Rh plated; Barrel: Brass, Gold plated; Spring: Stainless steel
- Current ration(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式): Crimp: R156-VCR, R156-CR; Solder cup: R156-VSC, R156-SC

□□□ □□

- □□ 24 □□ □□ □□□□□□.
- □□ □□□□ □□ □ OEM □ □□□□.
- □□□ □□□□ □ □□ □□□□ □□ □□ □□□□□.
- □□□ □□□□ □□□□ □□□ □□ □□.

□□ □□

PCB, ICT, FCT □□□ □□□□ □□□□□ □ (□□);

□ □□ □□ □□ □□□ □□□ □□□ □□, □□ □□, □□□, □□□ □ □□□ □ Pogo □ (□□□). □□ □□ □□ □□□□;

BGA □ □□□ □□□□□□ □□ □□□;

□□□□ □□□ □, □□ □, LM □ QZ □ VZ □□□;

□□ □□ □□□, □□□ □□□, □□□□□ □□;

□□□ & □□□ / □□;

□□ □□ □□ □□, 30 # OK □□, □□ □□ □□, POM, □ □□ □

□□ □□



□□ □□

