

00 00

00	SFENG
00 00	SF-P020-J
000	00 00 Becu, 0 00 00 00
0	00, 0 00 00 00
0	SK4, 00 000
0 00	80g
00 00	2.0MM
00 00	1A
00 00	120mΩ
00	1.0mm 0
00 00 00	0.75mm 0
MOQ	100 0
00 00	7 0 00000 0

00 00


胜峰探针
SFENG
The China's The World's

RoHS

QUALITY ASSURED FIRM
ISO 9001
SGS

CE

chinapogopinsupplier.com

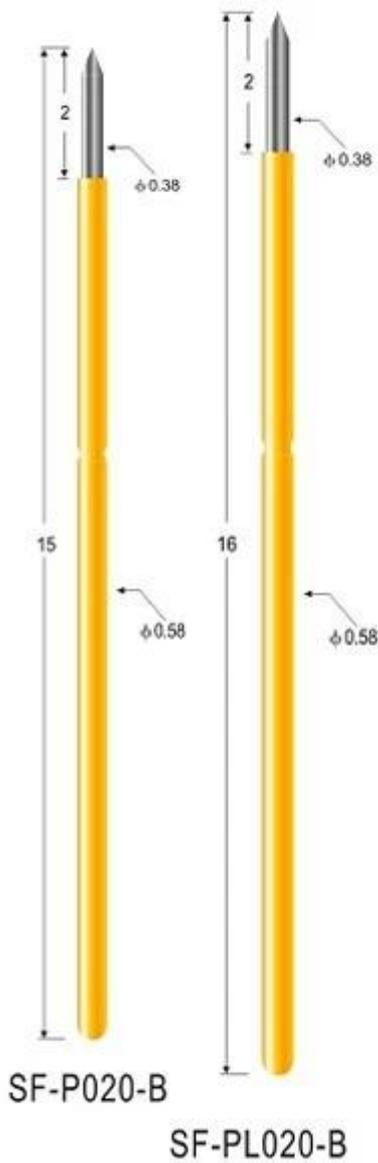

Probe specifications SF-P020 PL020 (寸)

- Recommended minimum center(最小间距): 1.0mm(.0394 ")
- Mounting hole size(钻孔尺寸): 0.75mm(.0295 ")
- Full travel(行程): 2.0(.0787 ")
- Spring force(弹簧压力): 80g(克)
- Materials and finishes(材料及涂饰):
Plunger:SK4,Rh plated
Barrel:Phosphor bronze,Gold plated
Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 120mΩ(毫欧姆)

Receptacle specifications

Materials and finishes: Phosphor bronze, Gold plated

□□□ □□□

24 □□ □□ withn □□ 1.Reply

2.Customized □□□□ □□□□, OEM □□

□□□ □□□□ □ □□ □□□□ □□□ □ 3.Delivery

□□□ □□□□ □□ □□ □□ □□□ 4.provide

□□ □□

--- □ PCB, ICT, FCT □□□□□□ (□□) □□□□□□ □;

--- □□ □ (□□□) □□□ (usuallytemporary) □□□ □□□□□

□□ □ □□ □□ □□ □□, □□, □□□, □□□ & A;

interconnectApplications;

semiconudtion □□□; --- □□ orBGA & A□ probef □□;

--- □□□ □□ □, coatingpin, LM □ withQZ & A; VZseries;

--- □□ □□ □□□, □□□ □□□, □□ □□ ...

--- □□□ & A, □□ / □□;

--- □□ □□ □□ compents, 30 # OKwire, □□ □□ □□, POM, Ironhinge □

□□ □□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□ □□

