

□□ □□

□□ □□	SF-P156-H
□□	4.75mm
□□ □□ □□	□□□:2.75mm □□ □□ □:2.80mm
□□ □□□□	4.5mm
□□□□□□	6.8mm
□□□ □	450gf@□□ 6.0mm
□□ □□□	3A
□□ □□	50mΩ □□
MOQ	100PCS
□□	□/□
□□ □□	□□□□ □□ □ 5~10□

□□ □□

P156-H3.0

Materials (Plated) (材質與鍍層):

① Barrel (針套) : Brass (黃銅) , Au on Ni Plated

② Plunger (針軸) : Ph (磷銅) , Ni Plated

Spring (彈弓) : SUS304 (不鏽鋼線) , /

Specifications (技術要求):

Current Rating (額定電流) : 5A

Contact Resistance (接觸電阻) : 50mΩ

Full Stroke (滿沖程) : 6.8mm

Rated Stroke (額定沖程) : 4.5mm

Spring Force (彈力) : 450gf@ load 6.0mm

標記	數量	更改文件號	簽字	日期
設計			標準化	
校對			審定	
審核			制圖	徐松孟
工藝			日期	2016.06.20

名稱



P156-H3.0

勝峰探針

說明: 1、所有尺寸的单位为mm
2、未注图示尺寸公差:
按GB1804-79 11级精度执行。



圖樣標記	圖樣比例
S A	5:1

共 1 頁 第 1 頁

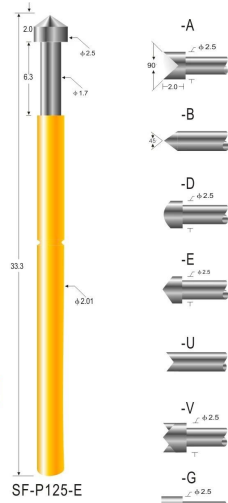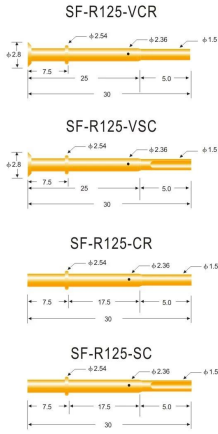

Probe specifications SF-P125(技术规格)

- Recommended minimum center(最小间距): 3.17mm(.1248")
- Mounting hole size(钻孔尺寸): 压克力: 2.40mm(.0945") 电木板、玻璃纤维板: 2.45mm(.0965")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 200g
- Materials and finishes(材料及涂饰): Plunger: Be Cu, Rh plated; Barrel: Brass, Gold plated; Spring: Stainless steel
- Current rating(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式): Crimp: R125-VCR, R125-CR Solder cup: R125-VSC, R125-SC

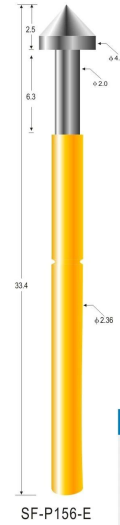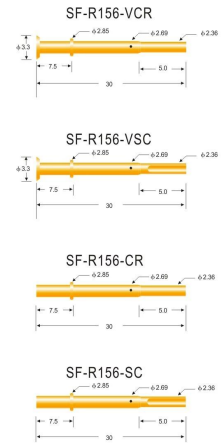

Probe specifications SF-P156(技术规格)

- Recommended minimum center(最小间距): 4.75mm(.1870")
- Mounting hole size(钻孔尺寸): 压克力: 2.75mm(.1083") 电木板、玻璃纤维板: 2.80mm(.1102")
- Full travel(行程): 6.30(.2480")
- Spring force(弹簧压力): 250g
- Materials and finishes(材料及涂饰): Plunger: Be Cu, Rh plated; Barrel: Brass, Gold plated; Spring: Stainless steel
- Current rating(额定电流): 5A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)
- Connections(接线形式): Crimp: R156-VCR, R156-CR Solder cup: R156-VSC, R156-SC





1. raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products



6. Packing



Measuring Equipment >



Measuring Equipment:

- 1. Agilent current testing;
- 2. Quadratic element measurement
- 3. Load Curve Meter
- 4. Bond Test
- 5. Life Fatigue Test



