

□□□

□□	SFENG
□□	□□□ □□□ SF-KP2.96 * 54 □□ □
□□□	□□□
□□	□□
□	□□□□□
□□□ □	□□□
□□ □□	5.0 mm
□□ □□	□□
□□ □□	□□
□□	□□
□□ □□	□□
MOQ	100
□□ □□	□□ □□ □ 7 □


□□ □□□



SFENG
The China's The World's



□□□ □□□ □□□ □□

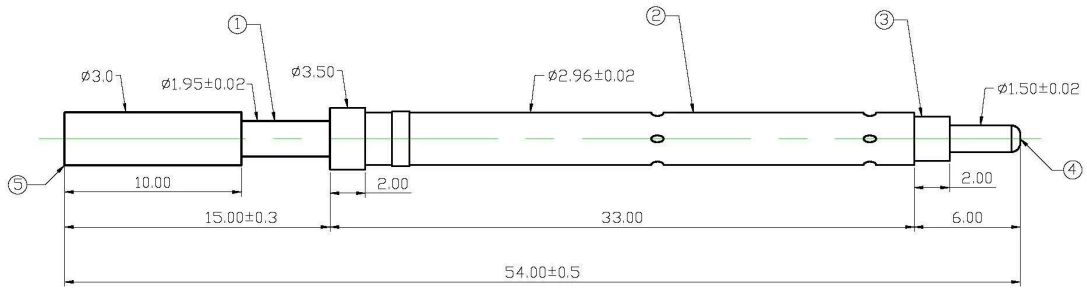

材质与电镀;

- ①针 头, 磷铜镀金;
- ②套 管, 黄铜镀镍;
- ③绝缘套, PEEK;
- ④尾 针, 磷铜镀金;
- ⑤绝缘套, 白色POM

技术要求;

- 满行程: 5.0mm
- 满行程弹力: 450g±90g
- 开关距离: 1.5mm
- 开关弹力: 120g±25g

				名 称:				胜峰科技			
				SF-开关针新PEEK 2.96X54带塑料头							
说明:											
1. 所有尺寸单位为mm											
2. 未注图示尺寸公差:按GB1804-79 11级精度执行											
标记	处数	更改文件号	签 字	日期	图 样	标 记	视 图	质 量	比 例	图纸编号:	
设 计			标 准 化		S	A	⊕		1:1		
校 对			审 定								
审 核			制 图	HJQ							
工 艺			日 期	2018-11-8	共 1 页					第 1 页	

□□ □□

1. □□ □□.
2. □□□ □□ □□□□□.
3. □□ □□ □□ □ □□ □□.
4. □□□□ □□ □□.

□□ □□

PCB, ICT, FCT □□□□ □□□□ □ (□□);

□□, □□□□, □□□, □□□ □ □□□□□□ 2 □□ □□ □□ □□ □□□ □□□□□ □□□ □ (□□□); □□ □□ □□□□□□;

BGA □ □□□ □□□ □□ □□ □□□;

□□ □ □□□ □□, □□□□ □□, LM □ QZ □ VZ □□□;

□□□ □□□, □□□ □□□, □□□□ □□;

□□□ □□□; □□ / □□;

□□ □□ □□ □□, 30 # OK □□, □□ □□, POM, □ □□ □

□□ □□



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products




6. Packing

□ □ □ □



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope

□ □ □ □ □ □

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

