

000

00	SFENG
00	000 000 SFM100
000	000 00
00	00
0	00000
000 0	000
00 00	3.0mm
00 00	00
00 00	00
00	00
00 00	00
MOQ	100
00 00	00 00 7 0

00 000



**SFENG**  
The China's The World's




□□□ □□□ □□□ □□□



# SF-M100

可选用的针头形式					
材料	针头类型	针头 电镀	特殊版本		
			φ	φ (inch)	
AU	A		φ 1.5	A	
AU	B		φ 0.45	A	
AU	B1		φ 0.7	A	
AU	H		φ 1.5	A	
AU	J		φ 0.5	A	
AU	D		φ 0.65	A	φ 1.0
AU	DG		φ 1.0	A	
AU	J1		φ 0.4	A	
AU	D2		φ 0.6	A	
AU	G		φ 1.0	A	φ 1.5
AU	V		φ 1.5	N	
AU	T		φ 1.5	N	

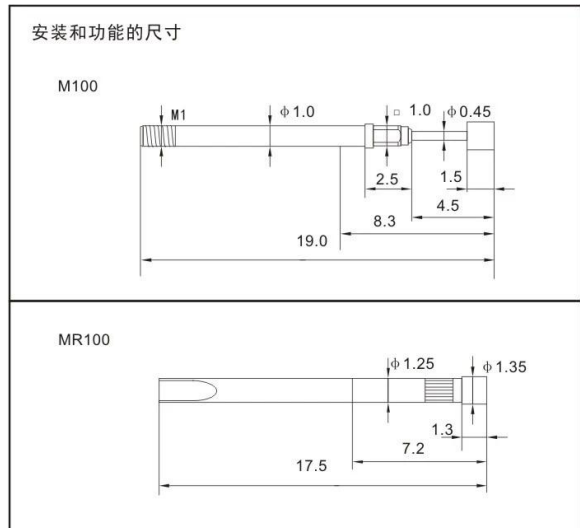

用来测试电缆束的探针  
 螺钉, 螺丝 螺纹设计  
 可用的螺旋工具

### 技术参数

间距: 1.91 mm/75mil  
 全行程: 3.00 mm  
 工作行程: 2.40 mm  
 预装弹力: 0.20 N  
 在工作行程下的弹力: 0.8 N

### 电气数据

电流: 3.0 A  
 电阻: ≤20 mOhm

### 材质

针管: 黄铜, 镀金  
 弹簧: 不锈钢  
 针杆: 铍铜, 镀金  
 套管: 黄铜, 镀金

### 推荐的钻孔直径

HP2361.1 (保温, 隔热材料) 1.25 mm  
 HGW2372 (玻璃钢, 玻纤棉) 1.26 mm

□□ □□

1. □□ □□.

- 2. 鋼材 鋼 鋼鋼鋼鋼.
- 3. 鋼 鋼 鋼 鋼 鋼 鋼.
- 4. 鋼鋼鋼 鋼 鋼.

鋼 鋼

PCB, ICT, FCT 鋼鋼鋼 鋼鋼鋼鋼 鋼 (鋼);

鋼, 鋼鋼鋼, 鋼鋼, 鋼鋼 鋼 鋼鋼鋼鋼鋼 2 鋼 鋼 鋼 鋼 鋼鋼 鋼鋼 鋼鋼鋼鋼鋼 鋼鋼 鋼 (鋼鋼); 鋼 鋼 鋼鋼鋼鋼鋼;

BGA 鋼 鋼鋼 鋼鋼 鋼 鋼 鋼鋼;

鋼 鋼 鋼鋼 鋼, 鋼鋼 鋼, LM 鋼 QZ 鋼 VZ 鋼鋼;

鋼鋼 鋼鋼, 鋼鋼 鋼鋼, 鋼鋼鋼 鋼;

鋼鋼 鋼鋼; 鋼 / 鋼;

鋼 鋼 鋼 鋼, 30 # OK 鋼, 鋼 鋼, POM, 鋼 鋼 鋼

鋼 鋼



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection




5. Finished products




6. Packing

鋼 鋼



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

