□□□ □□□ SF-2.87 BY 56.0-H

□□□

□□	SFENG
□□	SF-PA1.65X32.3-LM2.0
□□□	□□
□□	□□
□	SWP
□□□ □	300g ± 20 %
□□ □□	3.0mm
□□	□□□
□□ □□	≤100mΩ
□□	ISO
MOQ	1000
□□ □□	□□□ □□□ □□ 7-15 □

□□□ □□□ □ □□□

SFENG
The China's The World's

□□□ □□□ □ □□□

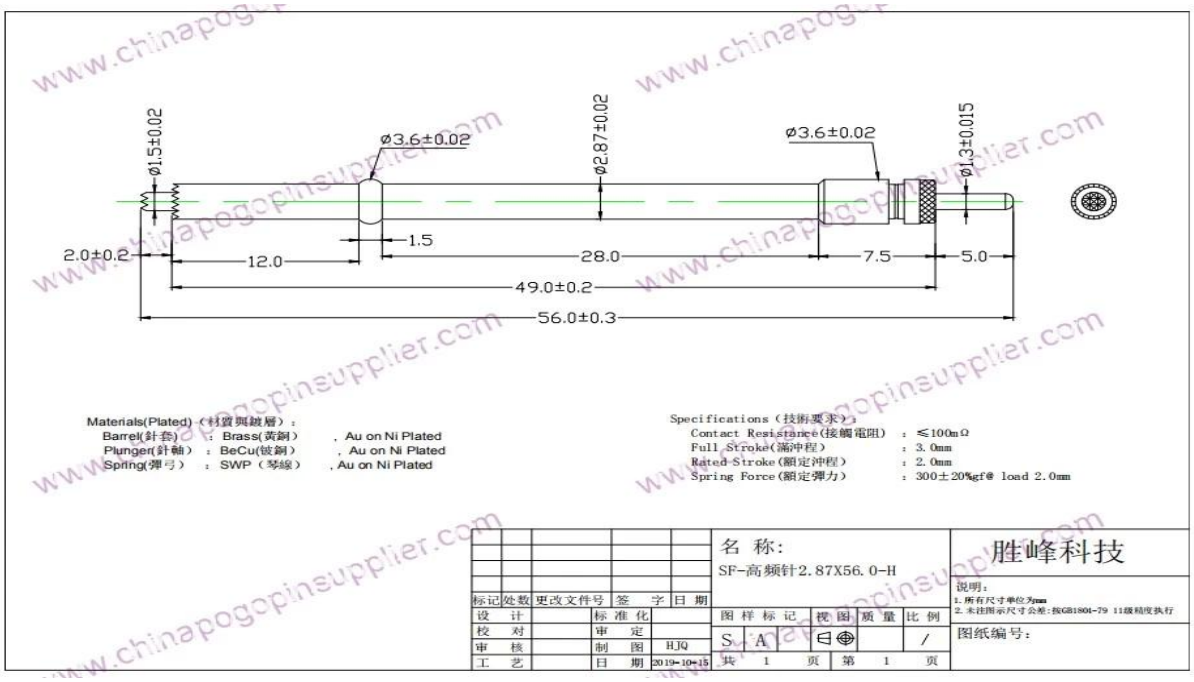
ø1.5±0.02
ø3.6±0.02
ø2.87±0.02
ø3.6±0.02
ø1.3±0.015
2.0±0.2
12.0
1.5
28.0
7.5
5.0
49.0±0.2
56.0±0.3
Materials(Plated)（材質與鍍層）:
Barrel(針套) : Brass(黃銅) , Au on Ni Plated
Plunger(針軸) : BeCu(铍銅) , Au on Ni Plated
Spring(彈弓) : SWP（琴線） , Au on Ni Plated
Specifications（技術要求）:
Contact Resistance(接觸電阻) : ≤100mΩ
Full Stroke(滿沖程) : 3.0mm
Rated Stroke(額定沖程) : 2.0mm
Spring Force(額定彈力) : 300±20%gf@ load 2.0mm
名 称:
SF-高频针2.87X56.0-H
胜峰科技
说明:
1.所有尺寸单位为mm
2.未注图示尺寸公差:按GB1804-79 11级精度执行
图纸编号:
标记 处数 更改文件号 签 字 日 期
设 计
校 对
审 核
工 艺
标 准 化
审 定
制 图 HJQ
日 期 2019-10-15
图 样 标 记
视 图
质 量
比 例
S A
/
共 1 页 第 1 页

□□□ □□□

1. □□ □□.

2. □□□ □□ □□□□□.

3. □□ □□ □□ □ □□ □□.

4. □□□□ □□ □□.

□□ □□

PCB, ICT, FCT □□□□ □□□□□ □ (□□);

□□, □□□□, □□□, □□□ □ □□□□□□ □ □□ □□ □□ □□ □□□ □□□ □□□□ □□□ □ (□□□) □□ □□ □□□□□□;

BGA □ □□□ □□□ □□ □□ □□□;

□□ □ □□□ □□, □□□ □□, LM □ QZ □ VZ □□□;

□□□ □□□, □□□ □□□, □□□□ □□;

□□□ □□□; □□ / □□;

□□ □□ □□ □□, 30 # OK □□, □□ □□, POM, □ □□ □

□□ □□

1. Raw material warehouse

2. Lathe workshop

3. Assemble workshop

4. Quality inspection

5. Finished products

6. Packing

□□ □□

1. Agilent current testing



2. Quadratic element

3.Load Curve Meter

4.Bond Test

5.Life Fatigue Test

6.Microscope

□□ □ □□

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.