


□□ □□

□□	SFENG
□□ □□	SF-P020 □□□
□□	□□ □□ □□ □□□
□□ □□	□□□□□ □ □□□ □□ 7 □

□□ □□



SF-P020

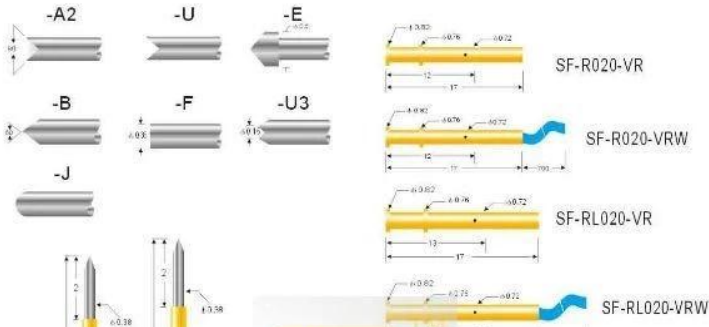

szshengfengdz.en.alibaba.com

Probe specifications SF-P020 PL020 (技术规格)

- Recommended minimum center(最小间距): 1.0mm(.0394")
- Mounting hole size(钻孔尺寸): 0.75mm(.0295")
- Full travel(行程): 2.0(.0787")
- Spring force(弹簧压力): 80g(克)
- Materials and finishes(材料及涂饰):
 Plunger:SK4,Rh plated
 Barrel:Phosphor bronze,Gold plated
 Spring:Music wire,Gold plated
- Current ration(额定电流): 1A(安培)
- Contact resistance(接触电阻): 120mΩ(毫欧姆)

Receptacle specifications
 Materials and finishes: Phosphor bronze,
 Gold plated

www.shengfengdz.com

□□□ □□

1. □□□ □□□ □□ □ □□□□. 24 □□ □□ □□ □□□□□□.
2. □□□ □□ □□□□ □□ □ OEM□ □□□□□.
3. □□□ □□□ □□□□ □ □□ □□□□ □□□ □□ □□□□□□.
4. □□□ □□□ □□□□ □□□□ □□□ □□ □□.

□□ □□

PCB, ICT, FCT □□□ □□□□ □□□□□ □ (□□);

□ □□ □□ □□ □□ □□□ □□□□ □□, □□ □□, □□□□, □□□□ □ □□□ □ Pogo □ (□□□). □□ □□ □□ □□□□;

BGA □ □□□ □□□□□□ □□ □□□;

□□□□ □□□ □, □□ □, LM □ QZ □ VZ □□□;

□□ □□ □□□, □□□ □□□□, □□□□□□ □□;

□□□ & □□□ / □□;

□□ □□ □□ □□, 30 # OK □□, □□ □□ □□, POM, □ □□ □

□□ □□



□□ □□

