

□□□

□□	□□
□□	□□ □□ SFM265-A
□□□	□□□
□□	□□
□	SWP
□□□ □	150g
□□ □□	5.3 mm
□□ □□	3A
□□ □□	≤50m Ω
□□ □□	□□ □□
□□ □□	□□
MOQ	100
□□ □□	□□ □□ □ 7□


□□ □□□



SFENG
The China's The World's



00 00 000 000 00

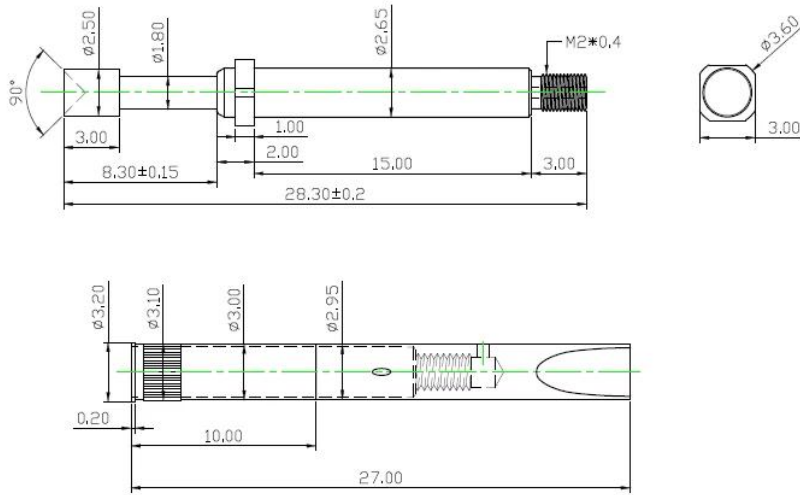

Materials(Plated) (材質與鍍層) :

- Barrel(針套-1) : Brass(黃銅) , Au on Ni Plated
- Plunger(針軸) : Ph(磷銅) , Au on Ni Plated
- Spring(彈弓) : SWP (琴鋼線) , Au on Ni Plated
- Barrel(針套-2) : Brass(黃銅) , Au on Ni Plated

Specifications (技術要求) :

- Current Rating(額定電流) : 3A
- Contact Resistance(接觸電阻) : ≤50mΩ
- Full Stroke(滿沖程) : 5.30mm
- Rated Stroke(額定沖程) : 4.0mm
- Spring Force(額定彈力) : 150±25gf@ load 4.0mm

				名称:		胜峰科技	
				SF-M265-A			
				SF-MRG265		说明:	
标记处数				更改文件号		1. 所有尺寸单位为mm	
设计				标准化		2. 未注图示尺寸公差: 按GB1804-T9 11级精度执行	
校对				审 定		图样标记	
审核				制 图 HJQ		视图	
工 艺				日期 2022-10-19		质量	
				共 1 页		比例	
				第 1 页		1:1	
						图纸编号:	

□□ □□

1. □□ □□.
2. □□□□ □□□□□□.
3. □□ □□ □□ □ □□ □□.
4. □□ □□ □ □□ □□.

□□ □□

PCB, ICT, FCT □□□□ □□□ □□ □(□□);

□□, □□□□, □□□, □□□ □ □□□□ □□ □ □□ □□ □□ □□□ □□ □□□ □(□□□); □□ □□ □□ □□□□;

BGA □ □□□ □□□ □□□ □□□;

□□ □ □□□ □□, □□□ □□, LM □ QZ □ VZ □□□;

□□□ □□□, □□□ □□□, □□□□ □□;

□□ □ □□□; □□/□□;

□□ □□ □□□□, 30# OK□□, □□□□, POM, □□□ □

□□ □□



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products




6. Packing

□□ □□



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope

□□ & □□

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

