□□□

□□	□□
□□	□□ □□□ SFM265-A
□□□	□□□
□□	□□
□	SWP
□□□ □	150g
□□ □□	5.3 mm
□□ □□	3A
□□ □□	≤50m Ω
□□ □□	□□ □□
□□ □□	□□
MOQ	100
□□ □□	□□ □□ □ 7□

□□ □□□

SFENG
The China's The World's

□□ □□ □□□ □□□ □□

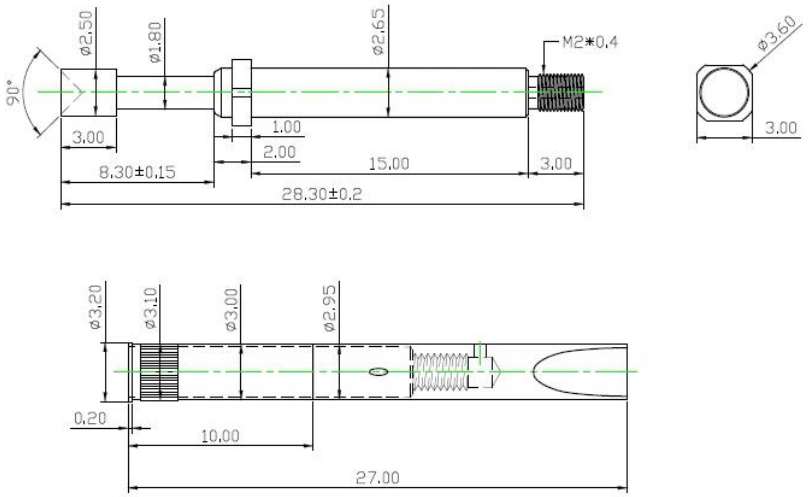

Materials(Plated)（材質與鍍層）：

Barrel(針套-1)	：Brass(黃銅)	, Au on Ni Plated
Plunger(針軸)	：Ph(磷铜)	, Au on Ni Plated
Spring(彈弓)	：SWP（琴鋼線）	,Au on Ni Plated
Barrel(針套-2)	：Brass(黃銅)	, Au on Ni Plated

Specifications（技術要求）：

Current Rating(額定電流)	：3A
Contact Resistance(接觸電阻)	：≤50mΩ
Full Stroke(滿沖程)	：5.30mm
Rated Stroke(額定沖程)	：4.0mm
Spring Force(額定彈力)	：150±25gf@ load 4.0mm

标记	处数	更改文件号	签 字	日 期	名 称:					胜峰科技
					SF-M265-A					
					SF-MRG265					说明: 1.所有尺寸单位为mm 2.未注图示尺寸公差:按GB1804-79 11级精度执行
设 计		标 准 化			图 样 标 记		视 图	质 量	比 例	
校 对		审 定			S	A			1:1	图纸编号:
审 核		制 图	HJQ							
工 艺		日 期	2022-10-19		共 1 页		第 1 页			

□□□ □□□

1. □□ □□.

2. □□□'□ □□□□□.

3. □□ □□ □□ □ □□ □□.

4. □□ □□ □ □□ □□.

□□ □□

PCB, ICT, FCT □□□□ □□□ □□ □(□□);

□□, □□□□, □□□, □□□ □ □□□□ □□ □ □□ □□ □□ □□ □□□ □□□ □□□□ □□ □□□ □(□□□); □□ □□ □□ □□□□;

BGA □ □□□ □□□ □□□ □□□;

□□ □ □□□ □□, □□□ □□, LM □ QZ □ VZ □□□;

□□□ □□□, □□□ □□□, □□□□ □□;

□□ □ □□□; □□/□□;

□□ □□ □□□□, 30# OK□□, □□□, POM, □□□ □

□□ □□

1. Raw material warehouse

2. Lathe workshop

3. Assemble workshop

4. Quality inspection

5. Finished products

6. Packing

□□□ □□

1. Agilent current testing



2. Quadratic element

3.Load Curve Meter

4.Bond Test

5.Life Fatigue Test

6.Microscope

□□ & □□

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.