

00 00

00	SFENG
00 00	0.8-2.0 * 95.25mm
00 0 00	00, SWP, 00 00;
00 00	7 0 00000 0

00 00

SFENG
The China's The World's

RoHS


QUALITY ASSURED FIRM
ISO 9001
SGS

CE

chinapogopinsupplier.com

SF-大头针系列

SF-大头针

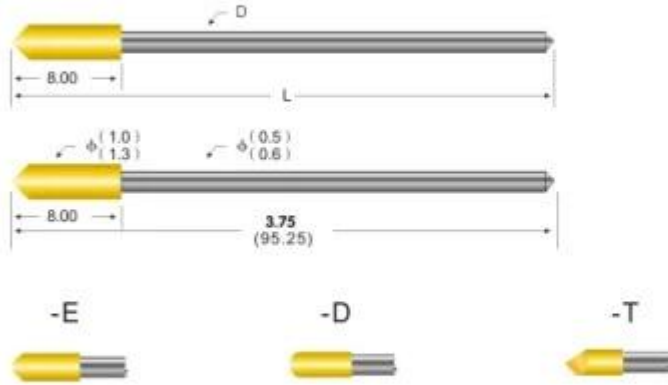

型号 Type(D)	长度 Linear(L)	可选针头类型 Available Tip Style
SF- ϕ 0.8-1.0	18、33、36、39、43.25、95.25	SF-E-D-T
SF- ϕ 0.8-1.3	18、33、36、39、43.25、95.25	SF-E-D-T
SF- ϕ 0.8-1.5	18、33、36、39、43.25、95.25	SF-E-D-T
SF- ϕ 0.8-1.8	18、33、36、39、43.25、95.25	SF-E-D-T
SF- ϕ 0.8-2.0	18、33、36、39、43.25、95.25	SF-E-D-T
SF- ϕ 0.8-2.5	18、33、36、39、43.25、95.25	SF-E-D-T
SF- ϕ 0.8-3.0	18、33、36、39、43.25、95.25	SF-E-D-T
SF- ϕ 0.8-3.5	18、33、36、39、43.25、95.25	SF-E-D-T
SF- ϕ 0.8-4.0	18、33、36、39、43.25、95.25	SF-E-D-T
SF- ϕ 0.8-6.0	18、33、36、39、43.25、95.25	SF-E-D-T

Probe specifications SF-大头针(技术规格)

- Recommended minimum center(最小间距): 1.3mm(.0512 ")
- Support Pressure(承受压力): 5kg
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50m Ω (毫欧姆)

□□□ □□□

1. □□□ □□ □ □ □□□□ 24 □□ □□ □□□ □□.
2. □□□ □□ □□□□ □□□□, OEM□ □□□□□.
3. □□□ □□ □ □ □□□□ □□ □□□ □□□ □□□□ □□□ □.
4. □□□ □□ □ □ □□□□ □□□ □□□□ □□ □□□ □□□ □□ □□.

□□ □□

PCB, ICT, FCT □□□ □□□□ □□□□ □ (□□);

□□ □ (□□□) □□□ □□ □□ □□ □□□□□□, □□ □□, □□□□, □□□□ & A; □□ □□ □□ □□□□;

BGA□ □□□ □□□□□□ □□ □□ □□□;




□□□ □□ □, □□ □, QZ □ VZ □□□ LM □;

□□ □□ □□□, □□□ □□□□, □□ □□ □□;

□□□ & A; □□ / □□;

□□ □□ □□ □□, 30 # OK □□□□, □□ □□ □□, POM, □ □□ □

□□ □□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
