


□□ □□

□□	SFENG
□□ □□	SF-P11
□□□	□□
□	□□
□	SUS □□ □□ □□□
□ □□	150g
□□ □□	4.0 (0.1575 ")
□□ □□	3A
□□ □□	50mW
□□	1.90 (0.0748 ")
□□ □□ □□	1.35 (0.532 ") / 1.40 (0.0551 ")
MOQ	(100) □
□□ □□	7 □□□□□ □ □□□

□□ □□

# SF-P11

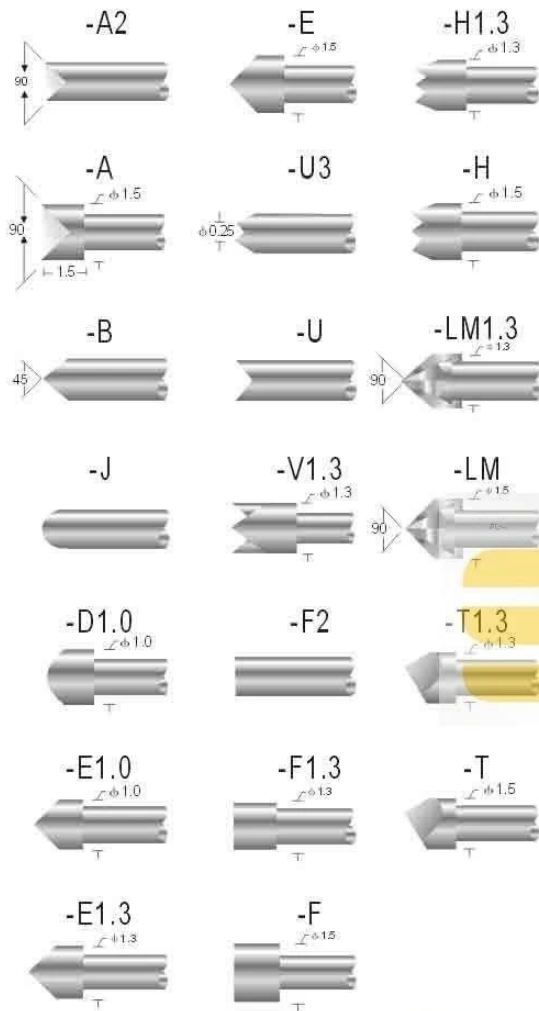

SP-P11-E

## Probe specifications SF-P11(技术规格)

- Recommended minimum center(最小间距): 1.90mm(.0748")
- Mounting hole size(钻孔尺寸):  
 压克力: 1.35mm(.0532")  
 电木板、玻璃纤维板: 1.40mm(.0551")
- Full travel(行程): 4.0(.1575")
- Spring force(弹簧压力): 150g
- Materials and finishes(材料及涂饰):  
 Plunger: Be Cu, Rh plated  
 Barrel: Brass, Gold plated  
 Spring: Stainless steel
- Current ration(额定电流): 3A(安培)
- Contact resistance(接触电阻): 50mΩ(毫欧姆)

[www.shengfengdz.com](http://www.shengfengdz.com)



[chinapogopinsupplier.com](http://chinapogopinsupplier.com)

## 优势 特点

1. 产品 种类 多 且 规格 24 种 均 符合 标准。
2. 产品 种类 规格 齐全 且 符合 国际 OEM 标准。
3. 产品 种类 多 且 规格 齐全 且 符合 国际 标准 且 符合 环保 要求。
4. 产品 种类 多 且 规格 齐全 且 符合 国际 标准 且 符合 环保 要求。

## 应用 范围

PCB, ICT, FCT 测试 探针 测试 针 (探针);

探针 (探针) 测试 针 测试 针 测试 针 测试 针, 测试 针, 测试 针, 测试 针 & A; 测试 针 测试 针;

BGA 测试 探针 测试 针 测试 针;







□□□ □□ □, □□ □, QZ □ VZ □□□ LM □;

□□ □□ □□□, □□□ □□□, □□ □□ □□;

□□□ & A; □□ / □□;

□□ □□ □□ □□, 30 # □□ □□□, □□ □□ □□, POM, □ □□ □

□□ □□

Spring exhausted tester	DC power supply	Current resistance tester
		
Microscope	Tensile strength tester	Spring tester
		

□□ □□

