

# ICT 000 000 SF-PS160-T1.36 \* 10.56MM


00 00

00	SFENG
00 00	PS160-D (2.0)
000	00 00 00 Becu, 0 00 Ni 00
0	0000 00 00, 0 00 Ni
0	SK4, 00 000
000 00	000 00 000 00
MOQ	100 0
00 00	0000 00 00 7 00 0

00 00

**SFENG**  
The China's The World's



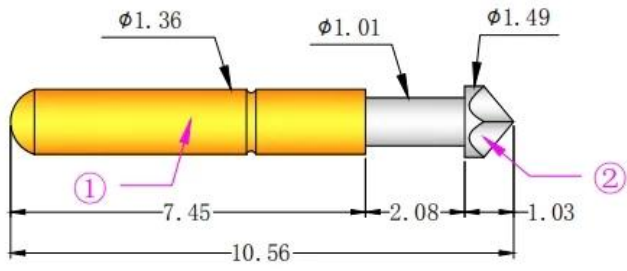

Materials(Plated) (材質與鍍層):

- ①Barrel(針套) : Brass(黃銅) , Au on Ni Plated
- ②Plunger(針軸) : Brass(黃銅) , Ni Plated
- Spring(彈弓) : SUS304 (不鏽鋼線) , /

Specifications (技術要求):

- Current Rating(額定電流) : 3A
- Contact Resistance(接觸電阻) : <50mΩ
- Full Stroke(滿沖程) : 2.08mm
- Spring Force(額定彈力) : 150~200gf@ load 2.08mm

□□□ □□□

1. □□ 24 □□ □□
2. Customized design □ □□□□, OEM □ □□□□□
3. Probe □□ □ □□ □□□□ □□ □□□□ □□□□□.
- □□□□□□ □□□□ □□ 4. provide the the □□ □□


□□ □□

- PCB, ICT, FCT □□□ □□□□ □ loaded pin (□□);
- □□ □ (□□□) □□□ (□□ □□) □□
- , □□□ □, □□□, □□□ □ □□□□□ 2 □□ □□ □□ □□
- ;
- □□ □□ □□□ □□ BGA □ □□□ □□□;
- □□ □□□ □□□, □□ □, LM □ with QZ & VZ series;
- □□ □□ □□□, □□□ □□□, □□□□□ □□ ...
- □□□ □ □□ / □□;
- □□ □□ □□ compents, 30 #OK wire, □□ □□, POM, Iron hinge □

□□ □□



1. Agilent current testing



2. Quadratic element




3. Load Curve Meter




4. Bond Test



5. Life Fatigue Test



6. Microscope



Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

