

□□□

□□	□□
□□	□□□ □□□ SF-KP1.65*44.6-J(□□ □)
□□□	□□□ □□
□□	□□
□	□□ □□□
□□□ □	300g(10.8oz) □□ 200g(7.2oz) □□ 100g(3.6oz)
□□ □□	5.0mm
□□□ □□	1.5±0.2mm
□□ □□	10mΩ
□	□□□□ □□, □, □□
□□□ □□	□□
MOQ	100
□□ □□	□□ □□ □ 15□

□□ □□□

**SFENG**


The China's The World's



**SFENG**  
The China's The World's



□□ □□ □□ □□

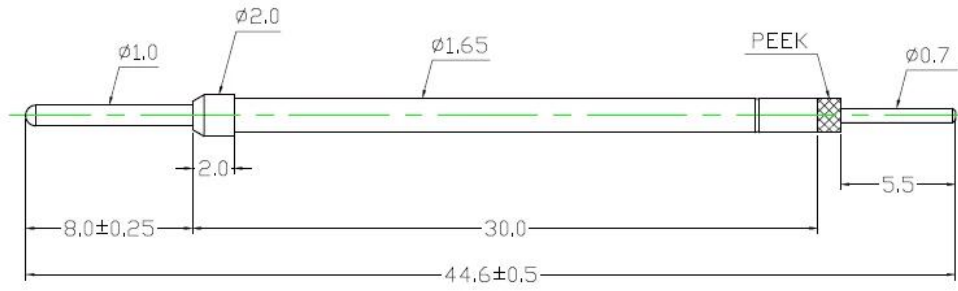

Specifications (技術要求):

Full Stroke (滿沖程) : 5.0mm  
 Rated Stroke (額定沖程) : 4.0mm  
 Spring Force (額定彈力) : 300 ± 20%gf@ load 4.0mm  
 Switching Path (開關距離) : 1.5 ± 0.2mm

Materials (plated) (材質與鍍層):

Barrel (針套) : Ph (磷銅) , Au on Ni Plated  
 Plunger (針軸) : BeCu (鈹銅) , Au on Ni Plated  
 Tail pin (尾針) : BeCu (鈹銅) , Au on Ni Plated  
 Spring (彈弓) : SWP (琴線) , Au on Ni Plated

				名称: SF-开关针1.65X44.6-J1.0				胜峰科技	
								说明: 1. 所有尺寸单位为mm 2. 未注图示尺寸公差:按GB1004-79 11级精度执行	
标记	处数	更改文件号	签字	日期	图样	标记	视图	质量	比例
设计					S	A	☉		/
校对					图纸编号:				
审核			制图	HJQ					
工艺			日期	2022-9-7	共	1	页	第	1

□□ □□



□□ □□

PCB, ICT, FCT □□□□ □□□ □□(□□);

□□, □□□□, □□□, □□□ □ □□□□ □□ □ □□ □□ □□ □□□ □□□ □□ □□□ □(□□□); □□ □□ □□ □□□□;

BGA □ □□□ □□□ □□□;

□□ □ □□□ □□, □□□ □□, LM □ QZ □ VZ □□□;

□□□ □□□, □□□ □□□, □□□□ □□;

□□ □ □□□; □□/□□;

□□ □□ □□□□, 30# OK□□, □□□, POM, □□□ □

□□ □□



1. Raw material warehouse



2. Lathe workshop



3. Assemble workshop



4. Quality inspection



5. Finished products




6. Packing

□□ □□



1. Agilent current testing



2. Quadratic element



3. Load Curve Meter



4. Bond Test



5. Life Fatigue Test



6. Microscope

□□ & □□

Standard products will be delivered out within 3 days. Customized products will be sent out within 15 days.

